

PIKETON

AREA IMPROVEMENTS PROJECT






Welcome! Thank you for visiting our virtual open house to learn more about the project and share your input to help us develop project plans. We welcome feedback through the project website, phone, email and mail as we strive to make the most informed decisions possible.

The virtual open house includes details on the following information:

- How the System Works
- Project Need & Benefits
- Project Map
- Routing Process
- Engineering
- Right-of-Way Practices
- The Construction Process
- Vegetation Management

HOW THE SYSTEM WORKS

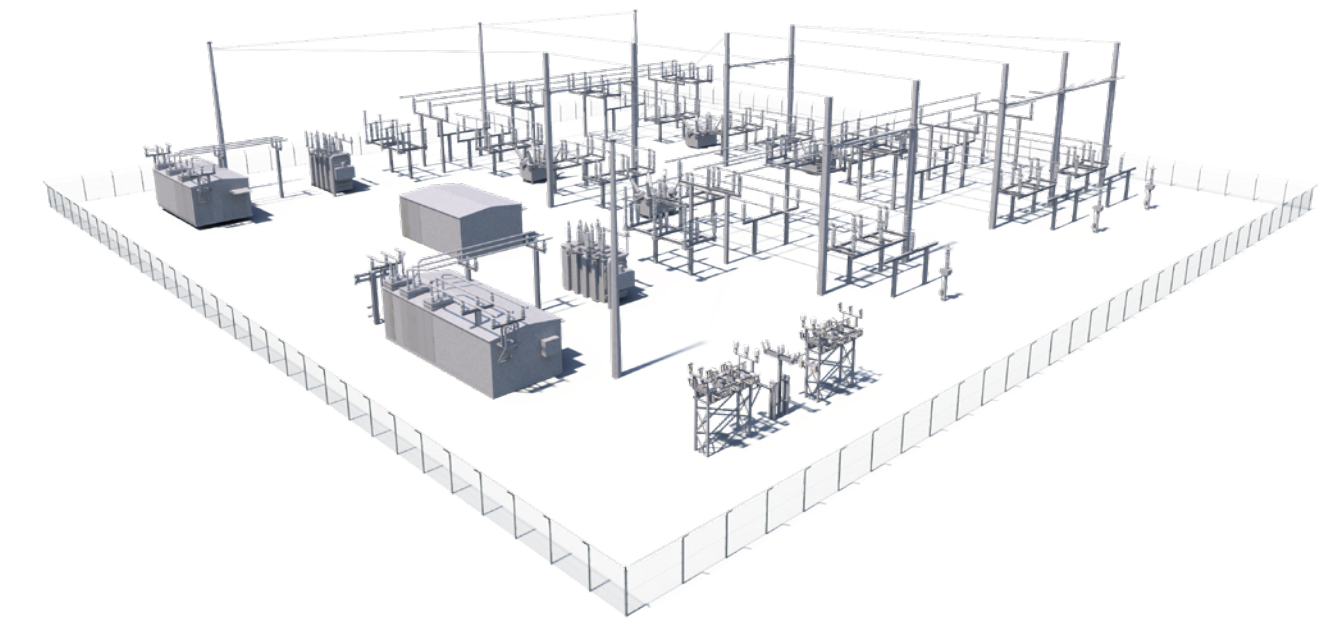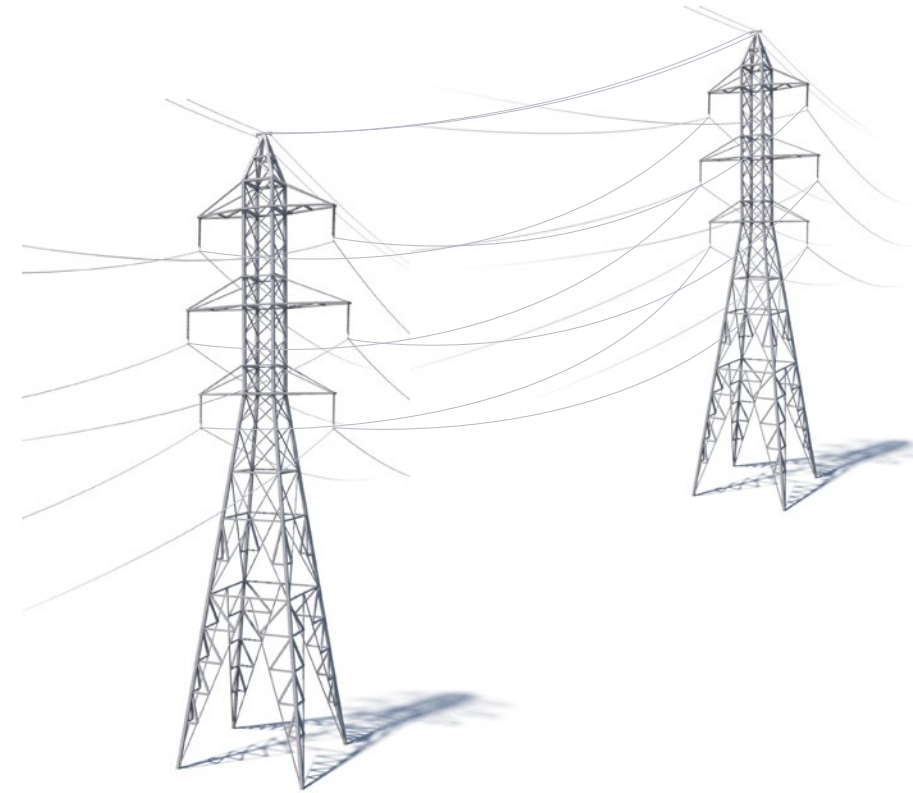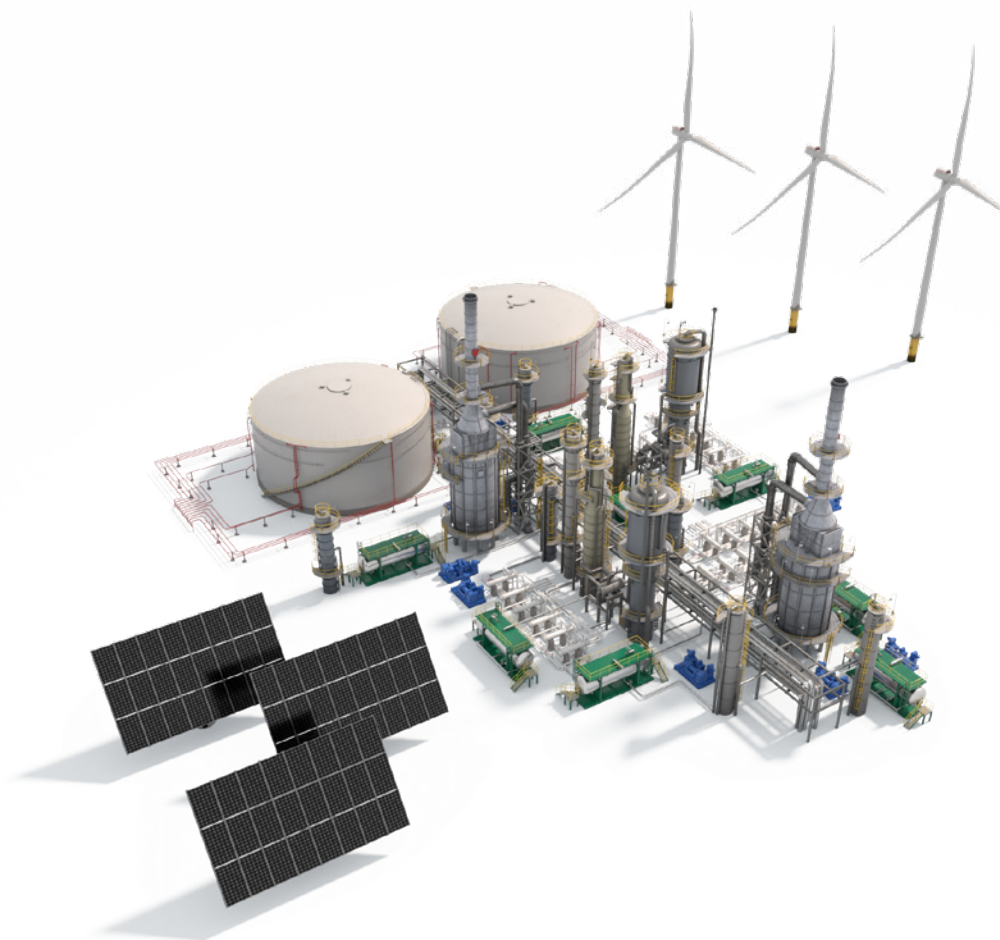

1. Generation Stations:

A generation station produces power to be transported long distances through transmission lines.


2. EHV Transmission:

Extra-high voltage (EHV) electric transmission lines are generally 765-kilovolt (kV), 500-kV and 345-kV.

3. Transmission Substations:


Substations direct the flow of electricity and either decrease or increase voltage levels for transport.

HOW THE SYSTEM WORKS

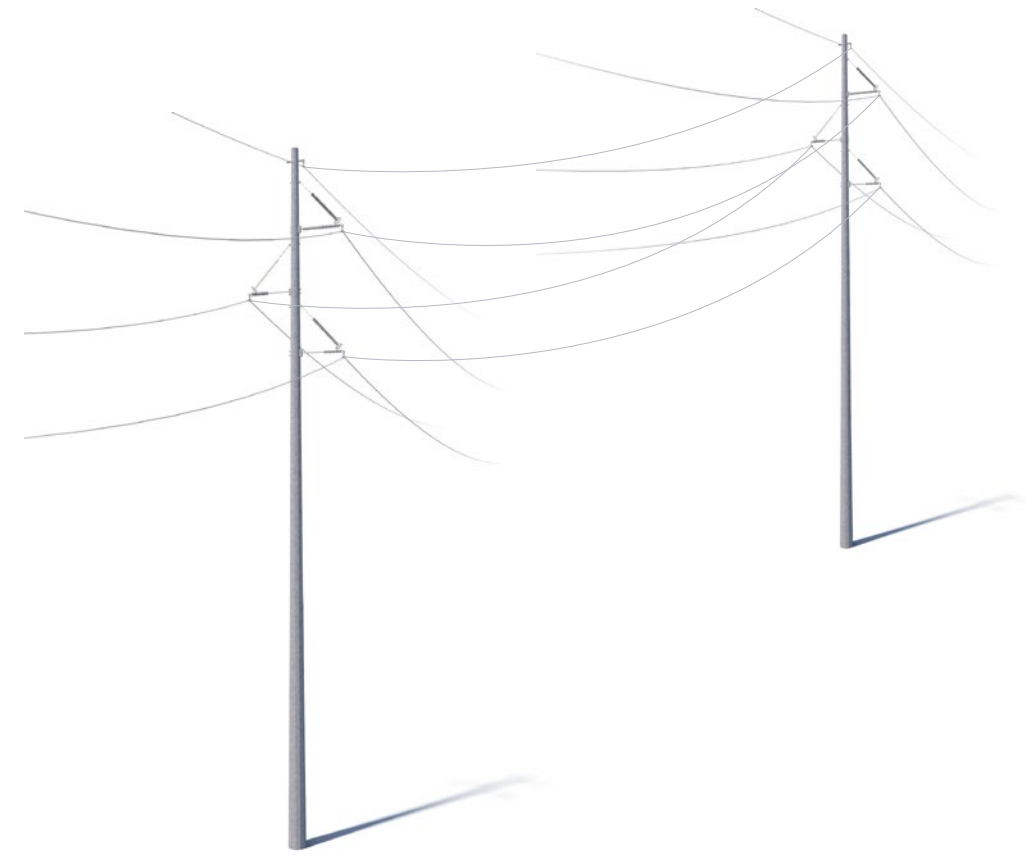


4. Local Transmission:

We typically use 69-kV and 138-kV transmission lines to move power shorter distances – for example, to different parts of a city or county.

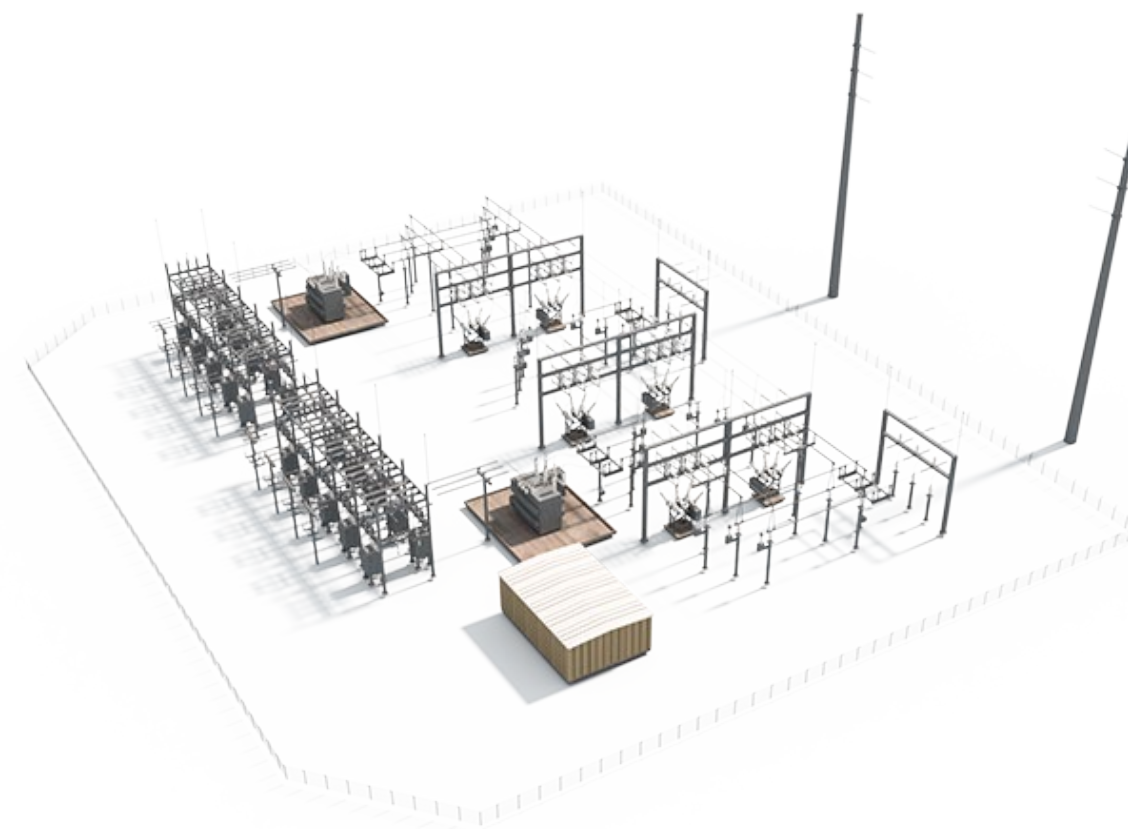

5. Distribution Substations:


Substations transform 69-kV and 138-kV electricity into lower distribution-level voltages such as 34.5-kV, 12-kV, or 7.2-kV.

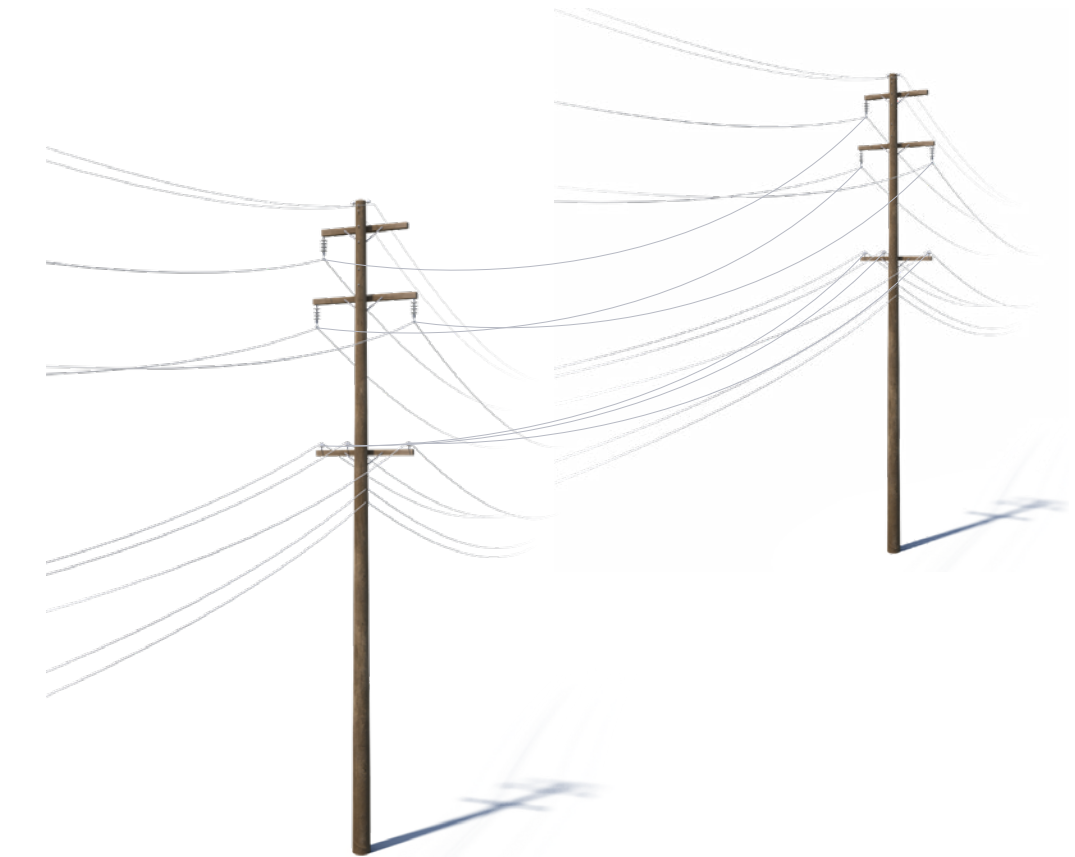

6. Primary Distribution:


These main lines (also called circuits) connect substations to large parts of the community.

HOW THE SYSTEM WORKS

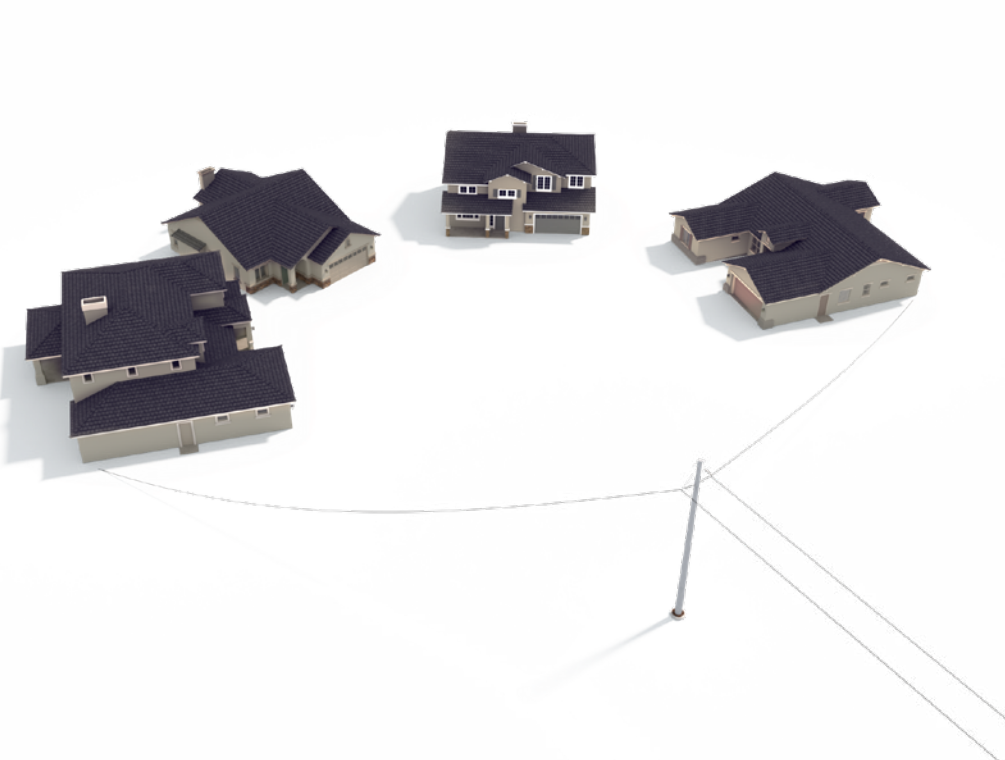

7. Lateral Distribution:

These lower-capacity lines deliver electricity to neighborhoods and other smaller groups of customers.

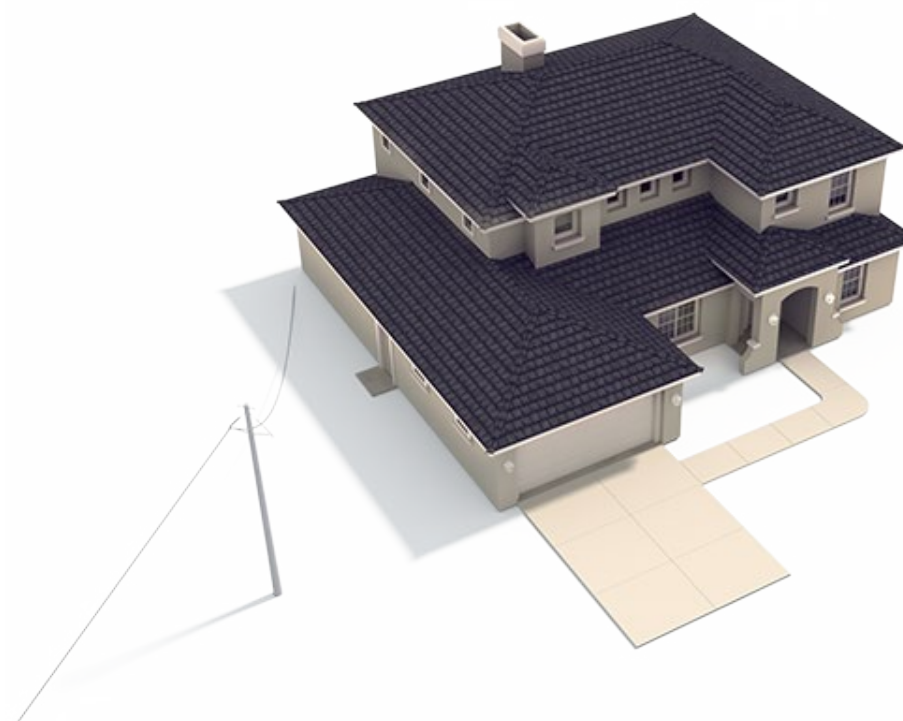

8. Individual Service:

Smaller transformers step down voltage to levels customers can use. Individual homes typically use 120/240 volts.

To use an analogy, electric transmission is like our national road system. Three kinds of power lines exist between power plants, homes and businesses:

- EHV lines are like interstate highways.
- High-voltage local transmission lines are like four-lane roads.
- Distribution lines are like two-lane roads that eventually connect to a driveway.

PROJECT NEED & BENEFITS




Why is the project important to our community?


The proposed additions to the power grid:

- Provide power to a new customer facility in the area.
- Create opportunities for future growth and community development.

PROJECT MAP

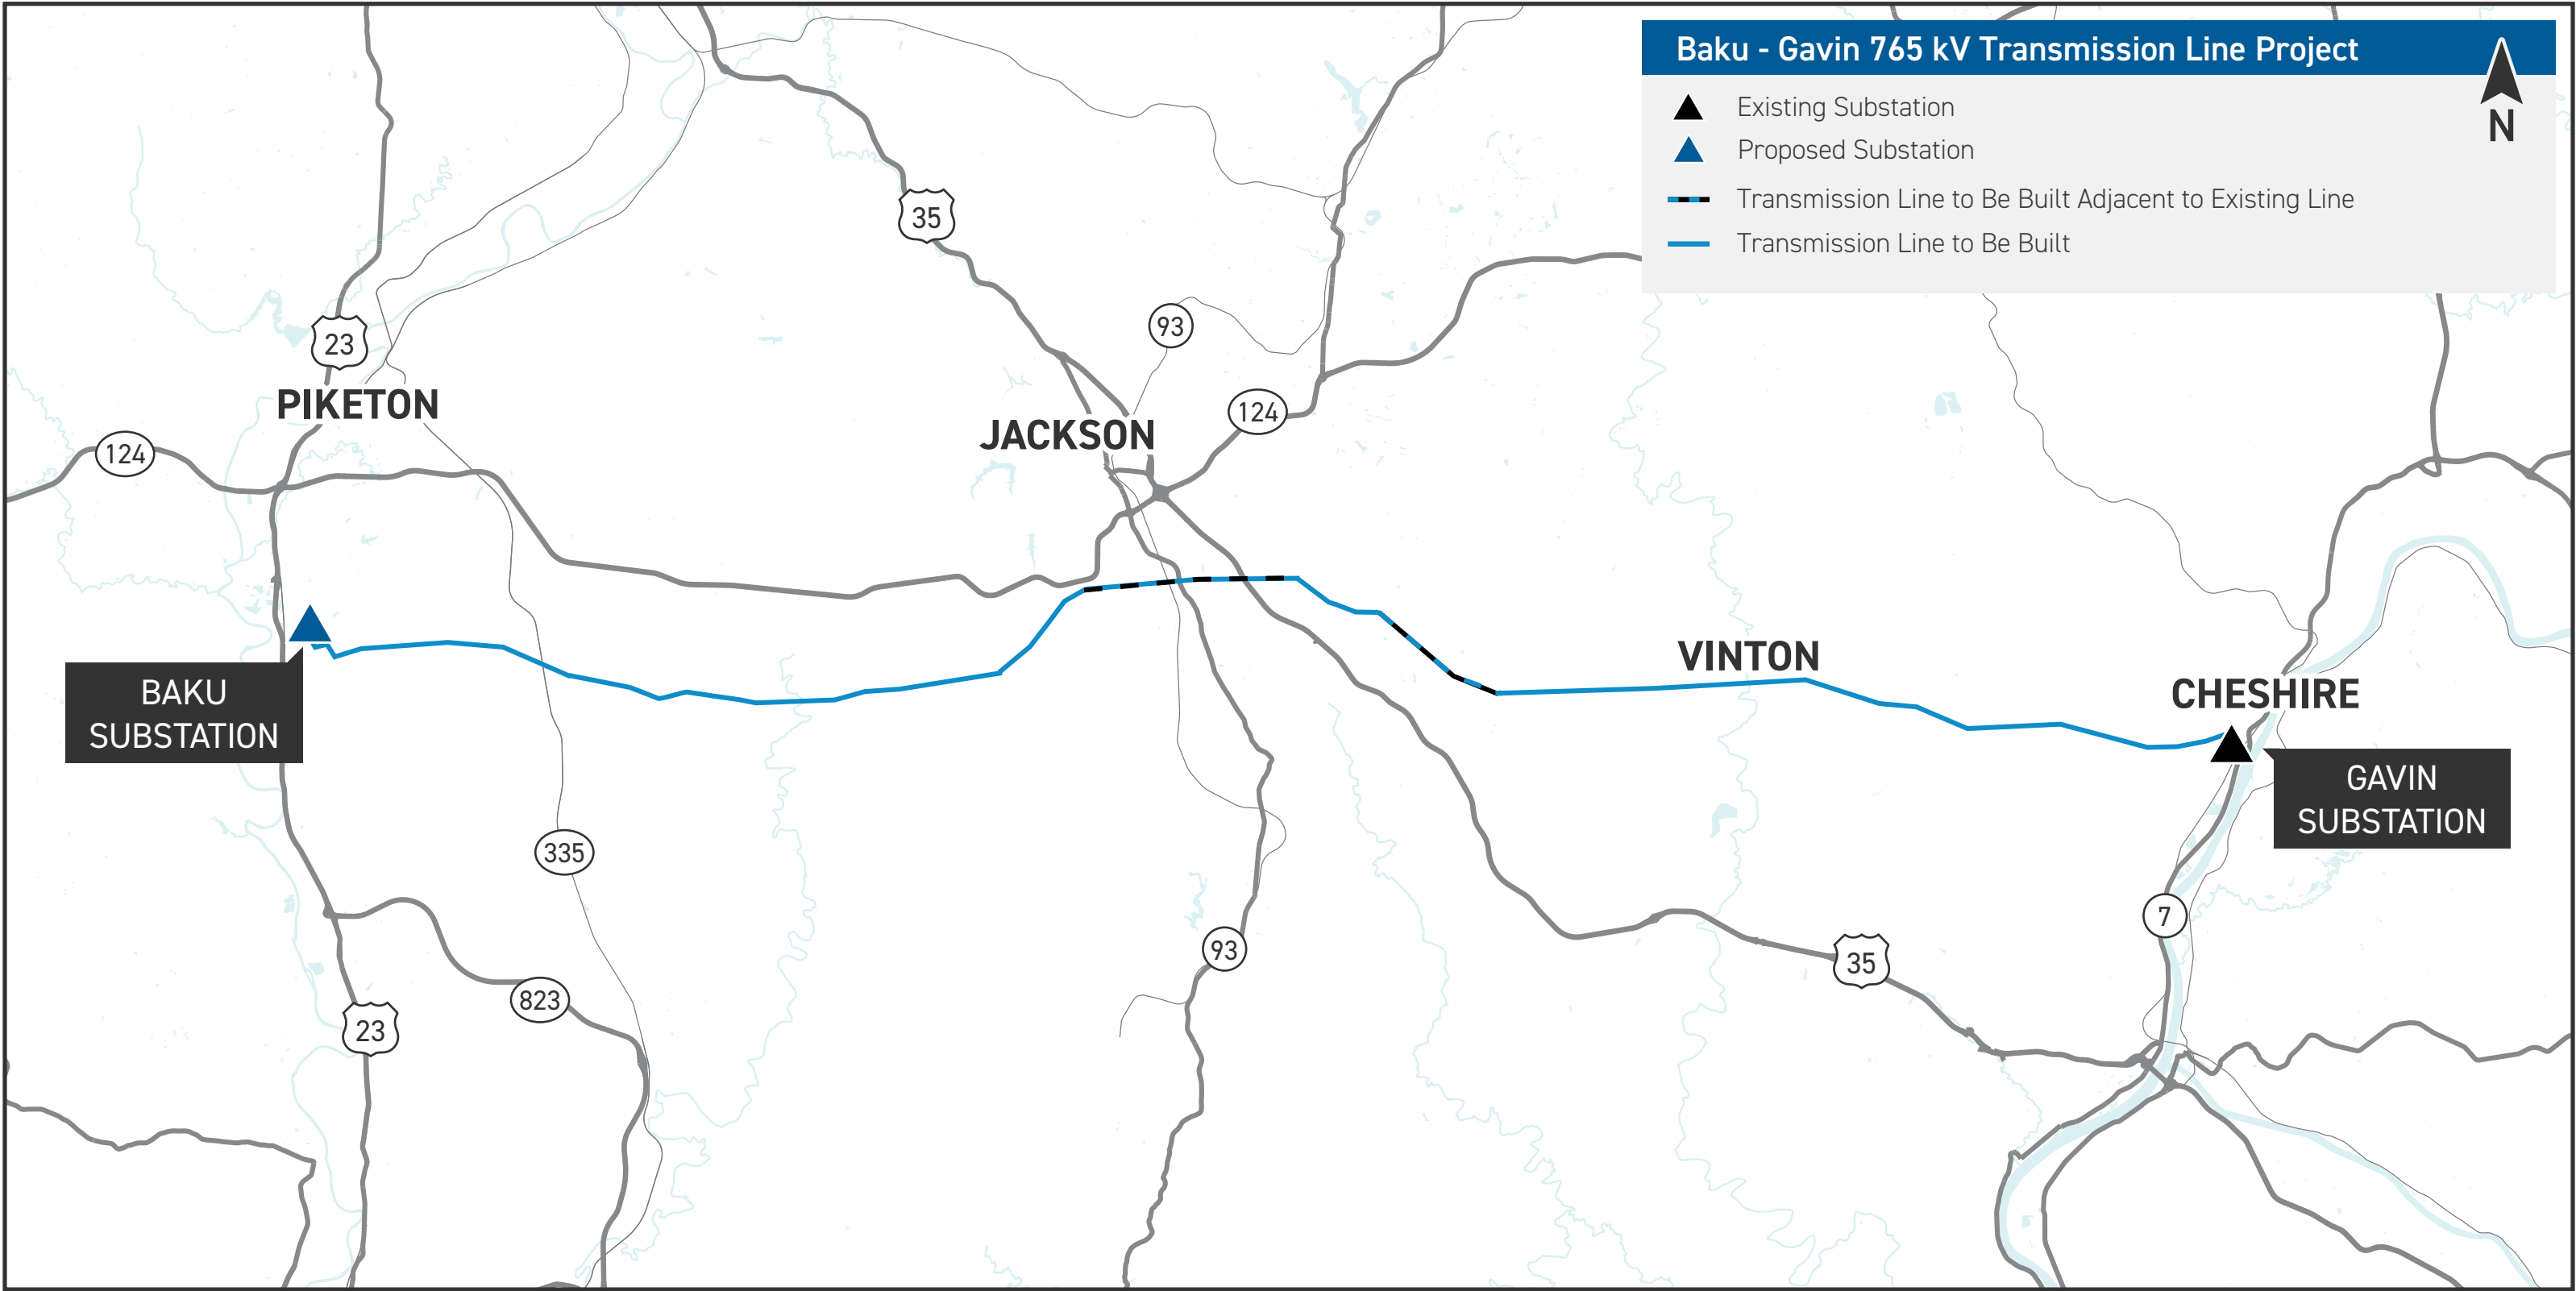


PROJECT TIMELINE

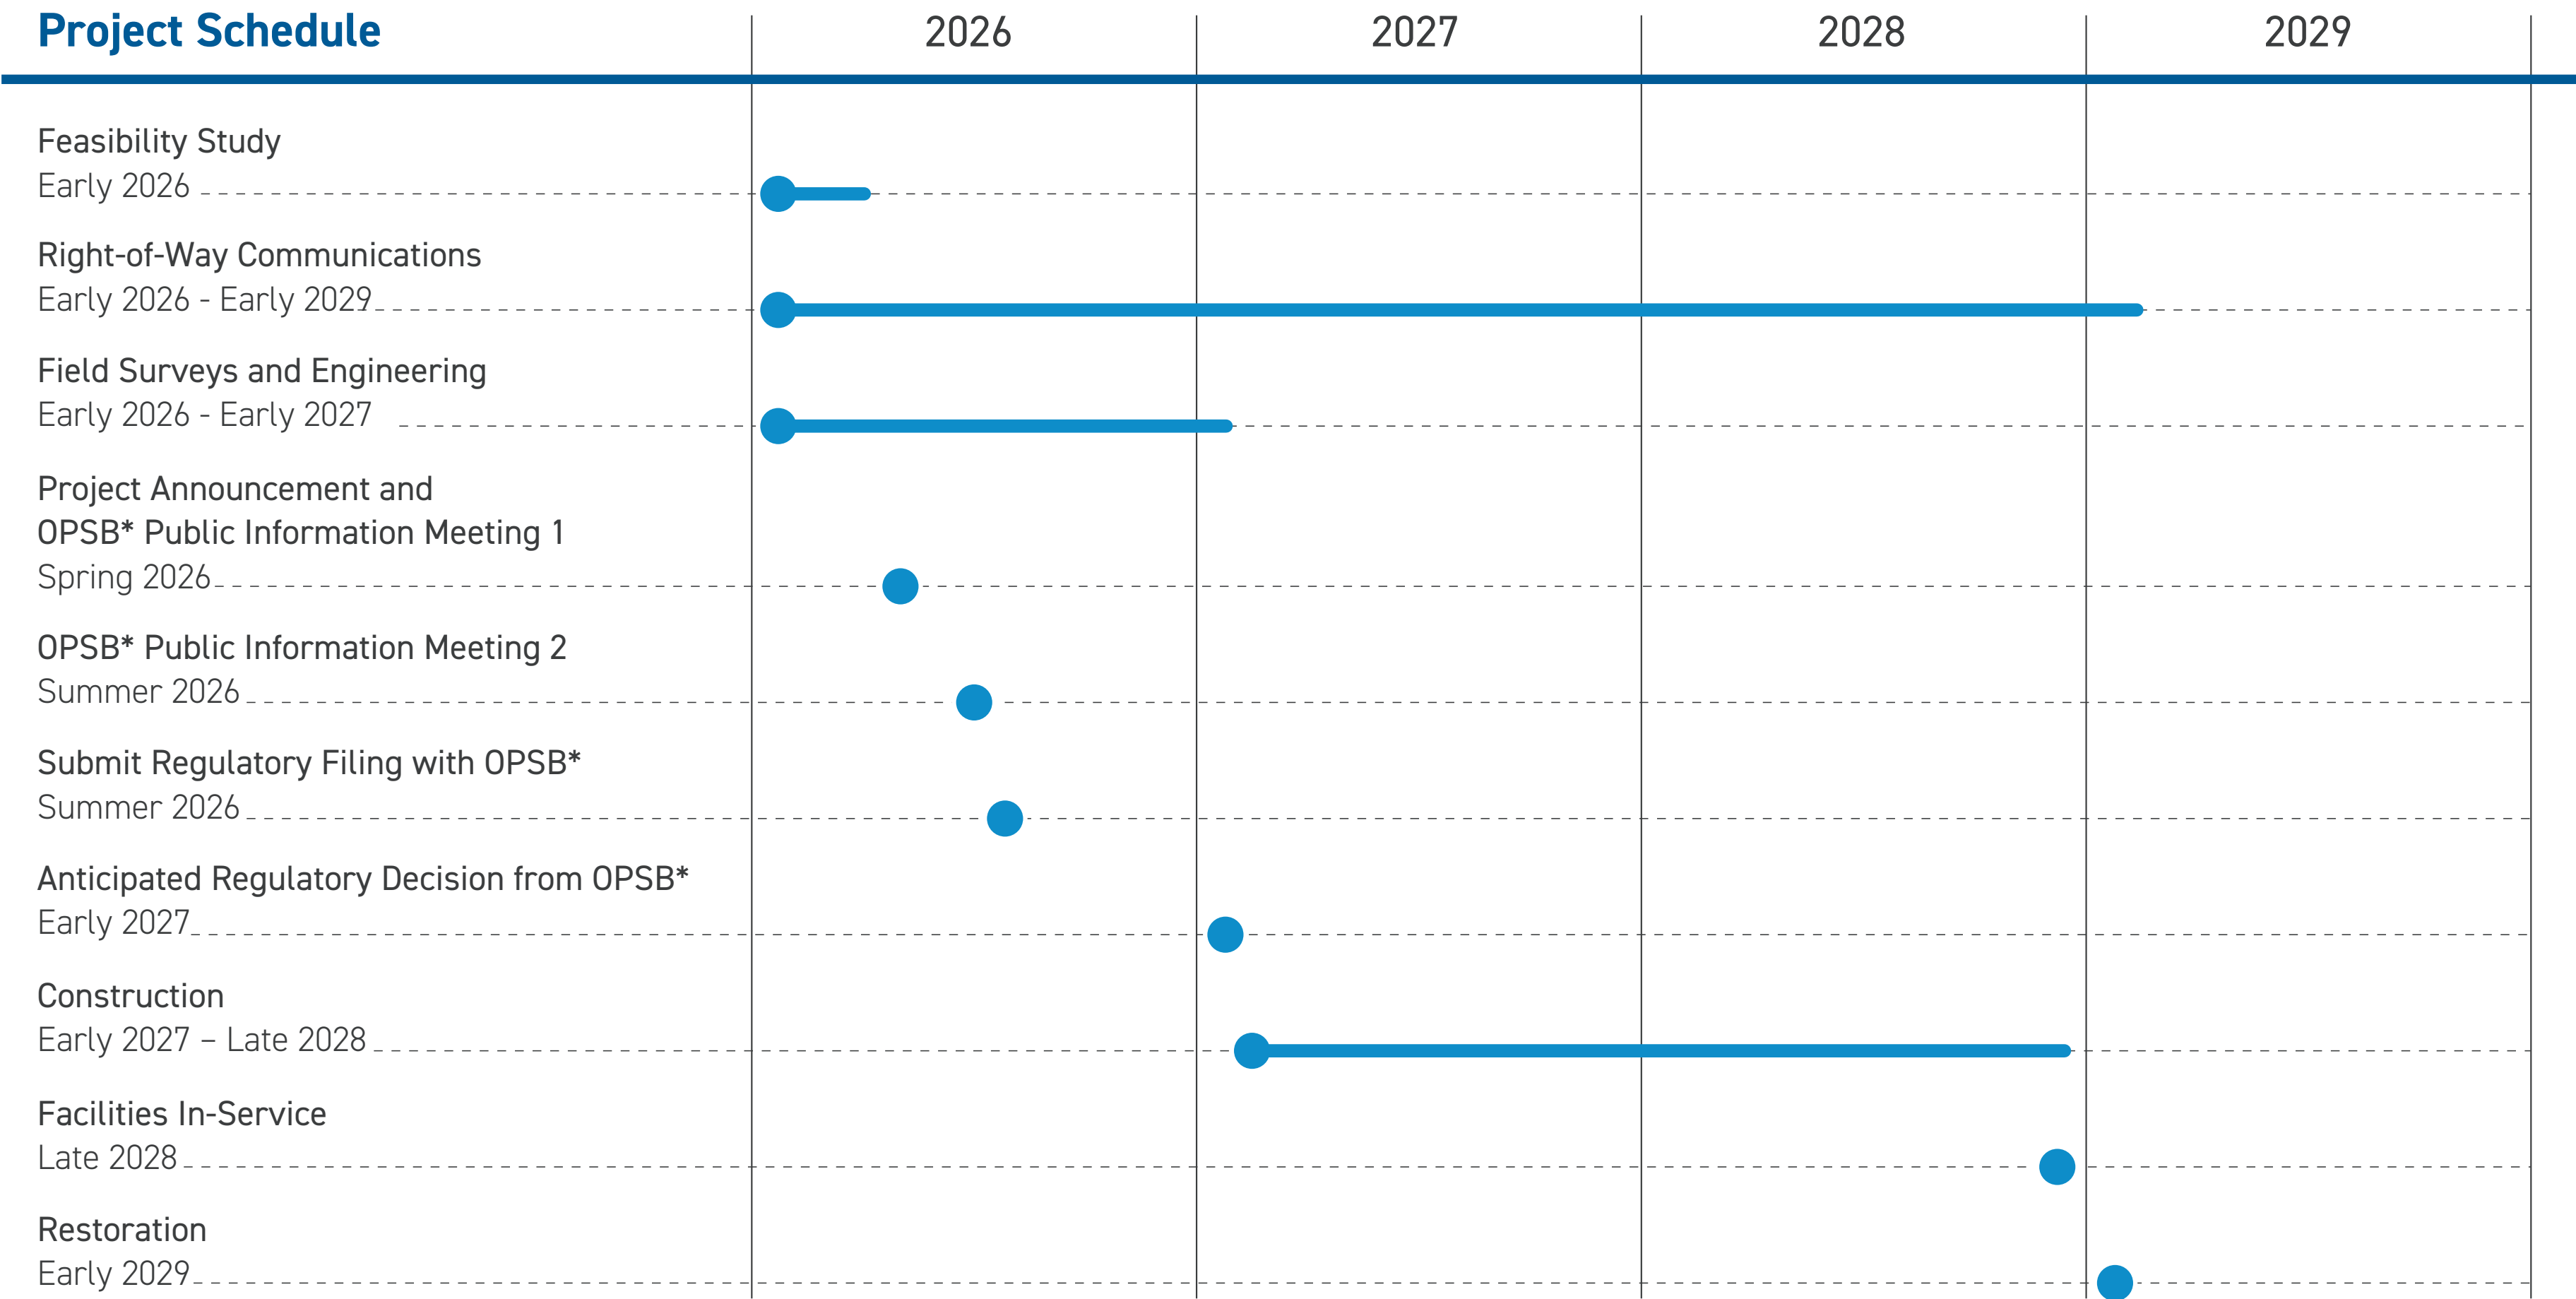


*Ohio Power Siting Board. *Timeline subject to change.

ROUTING PROCESS

We implement a comprehensive routing process that takes land use, the environment, public input and engineering guidelines into account to develop a transmission line route. The information below illustrates each stage of the routing process.

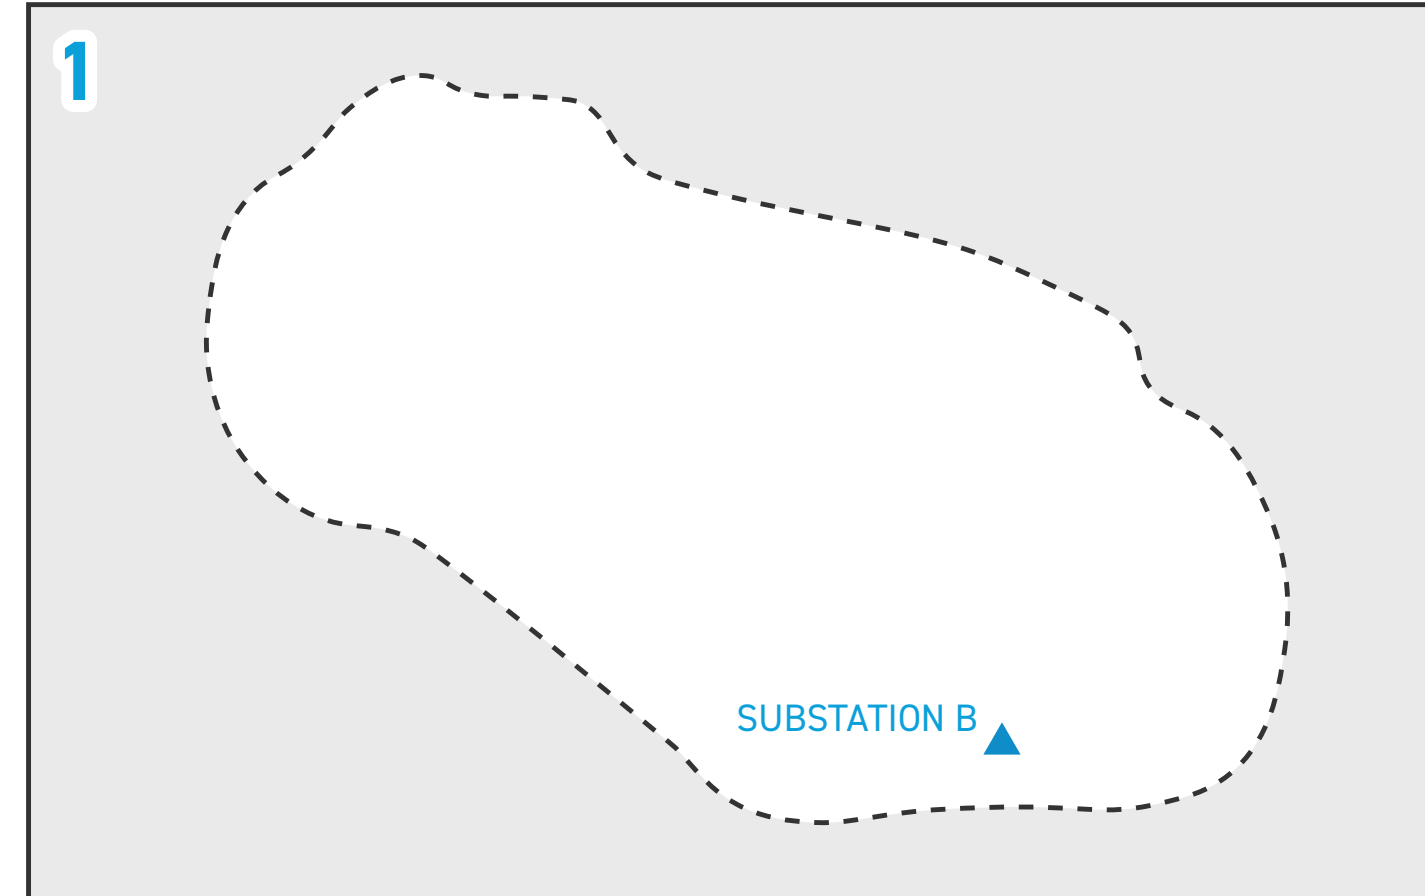


1. Study Area: Develop a study area for the project that incorporates both end points of the power line and the area between.

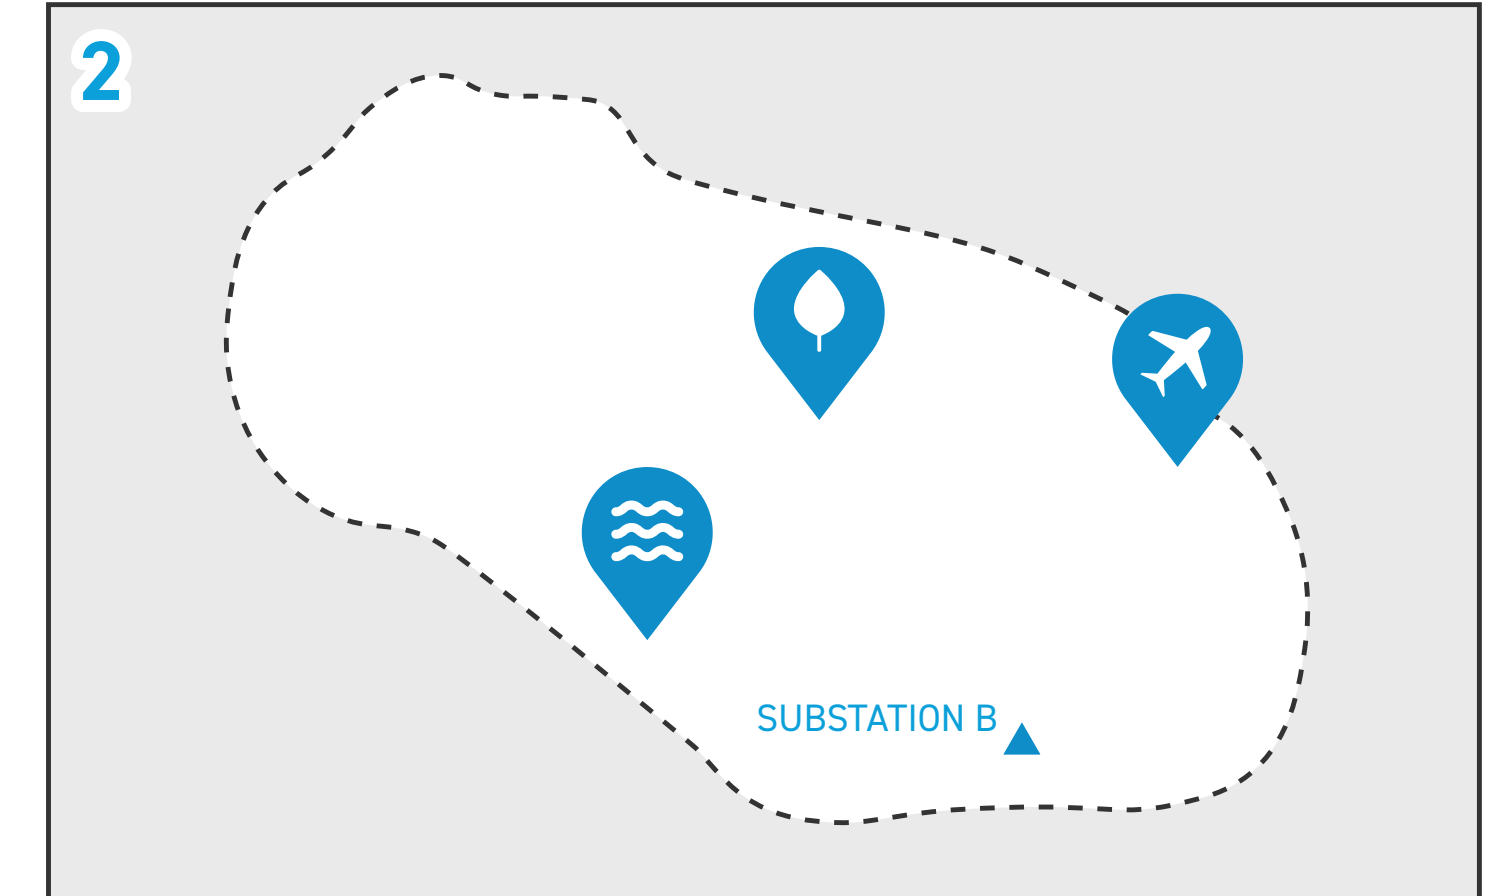


2. Information Gathering: Data is gathered for the defined study area including environmental, land use, historic and cultural resources, existing infrastructure and sensitive areas.




ROUTING PROCESS

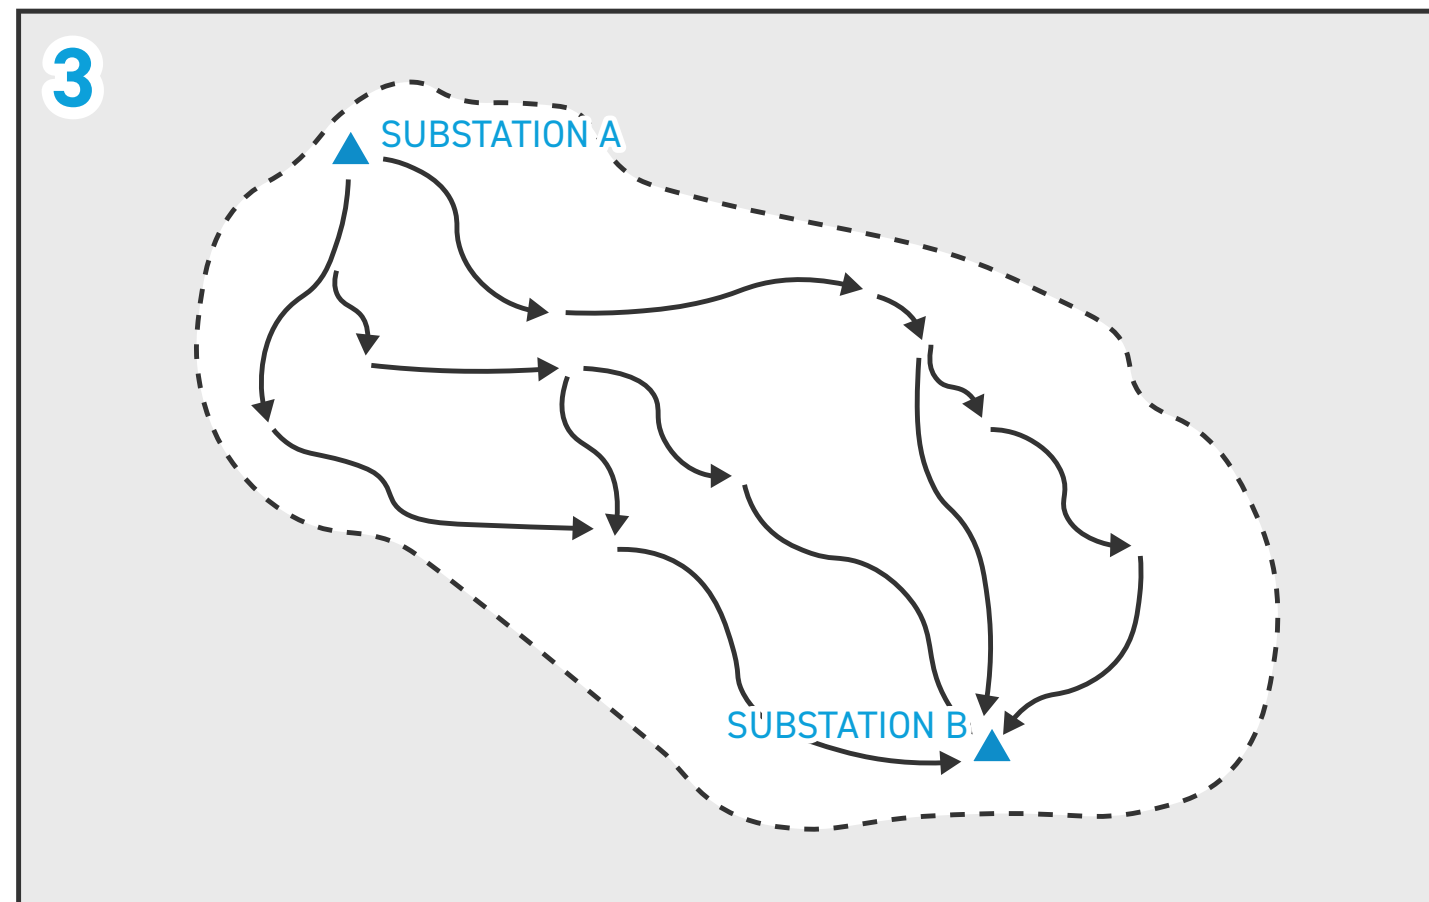

3. Conceptual Routes: The routing team uses data gathered to develop conceptual routes adhering to a series of general routing and technical guidelines.

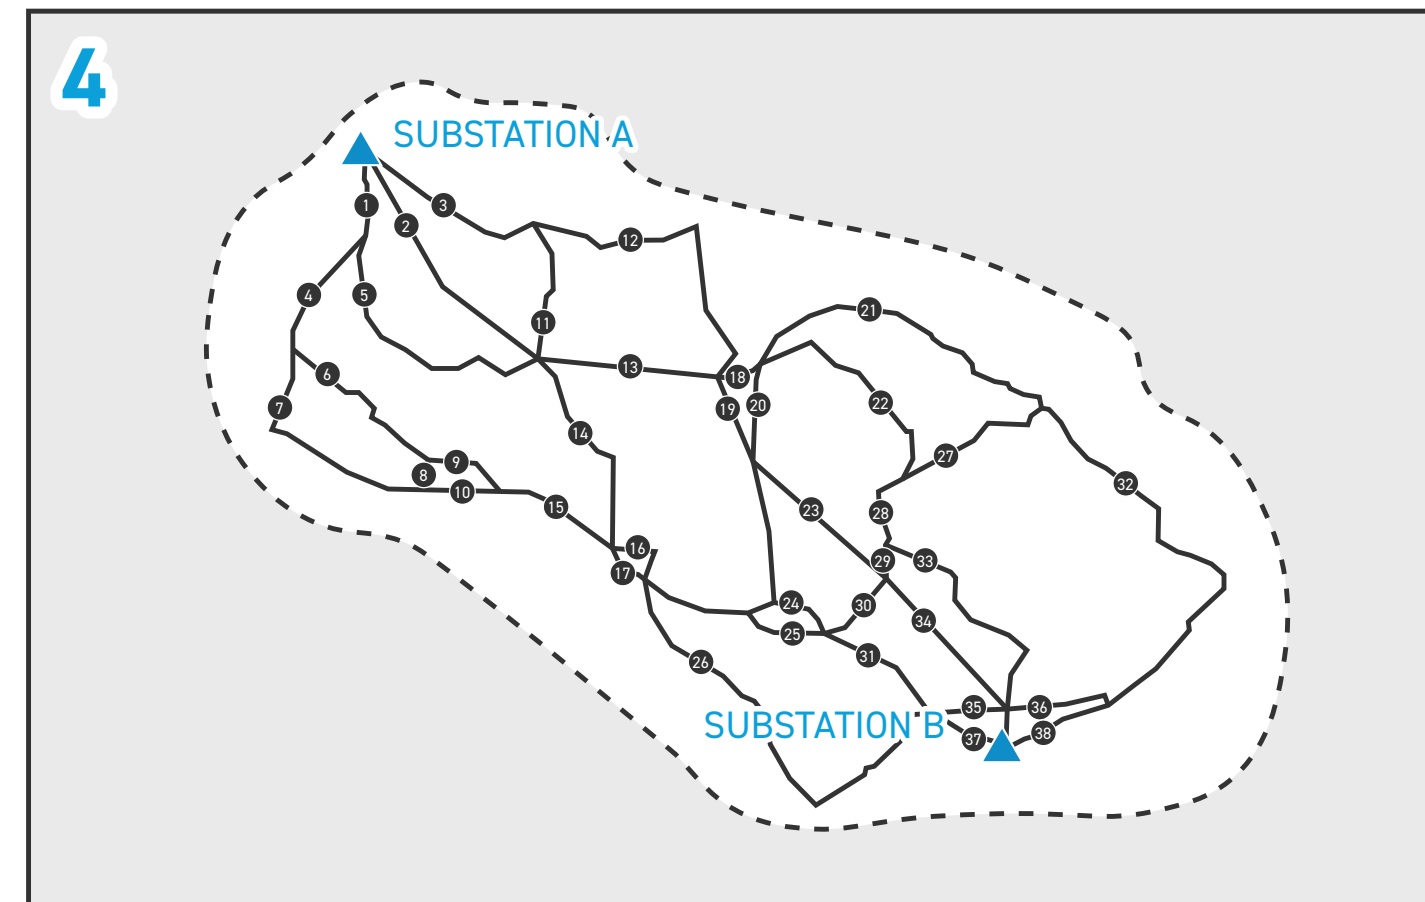


4. Study Segments: Study Segments are derived from conceptual routes. Study segments are formed between two common points of intersection. Together, the collection of study segments is referred to as the study segment network.

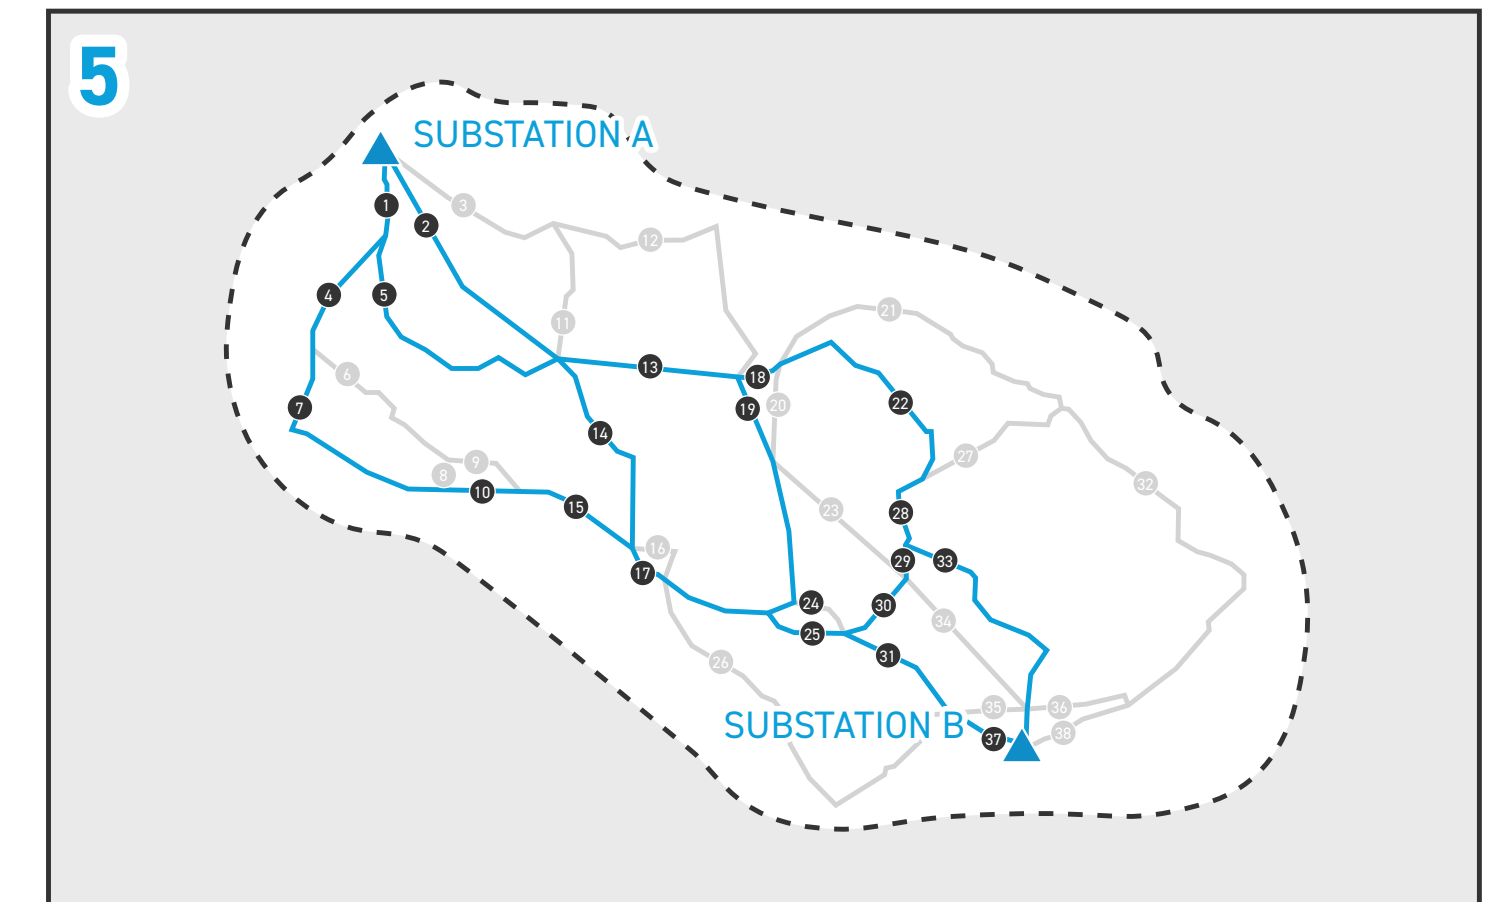


5. Refined Study Segments: As more information is gathered, the study segments are refined. Some study segments are eliminated or modified, leaving the refined study segments for further consideration.

ROUTING PROCESS

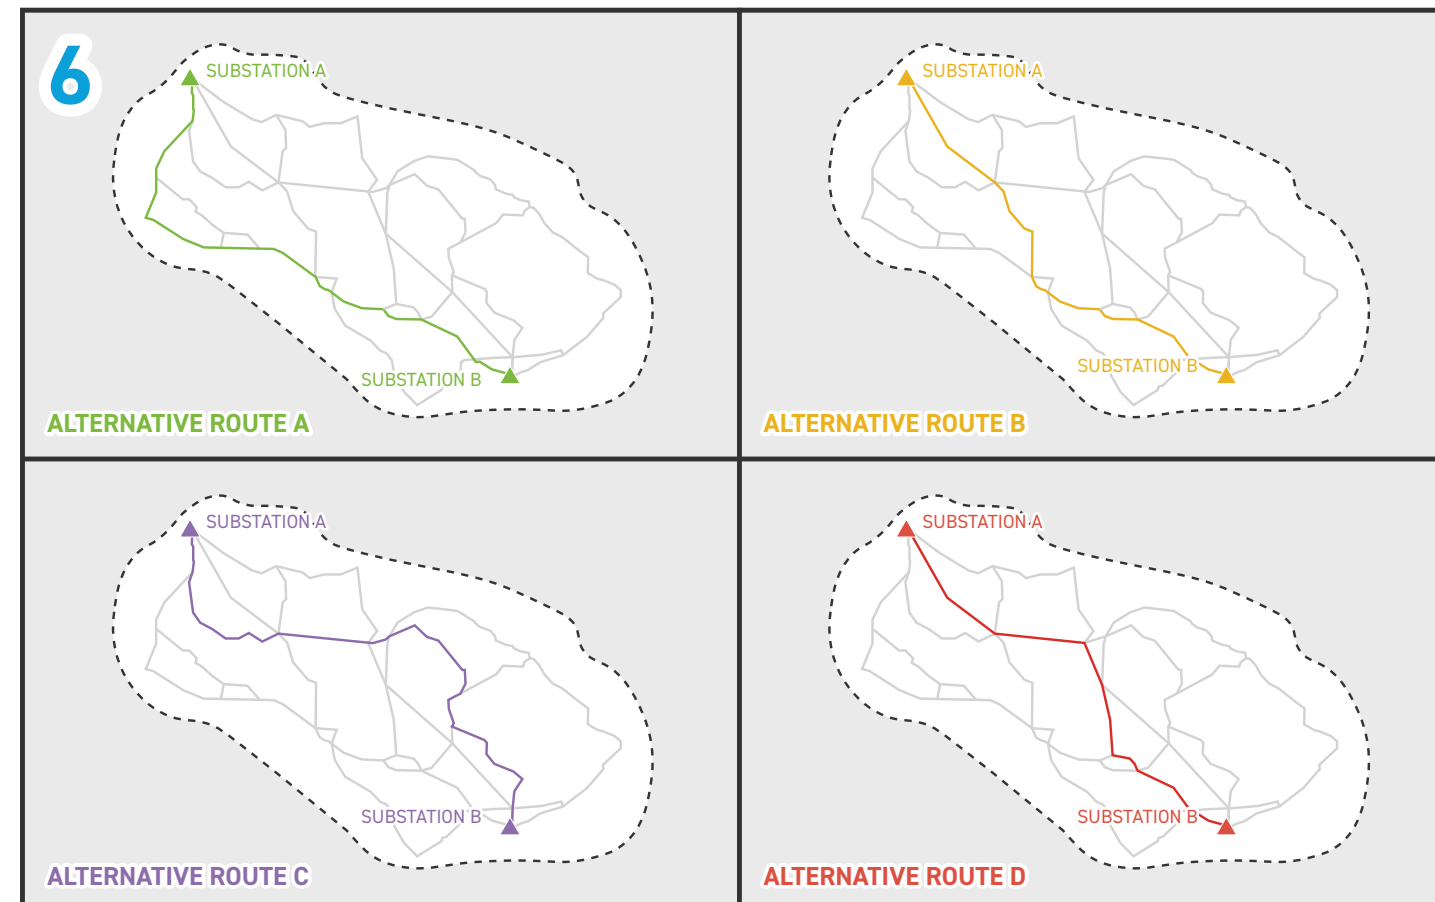

6. Alternative Routes: After public input is gathered, study segments are further refined and evaluated. The most suitable segments are selected and assembled into alternative route options.

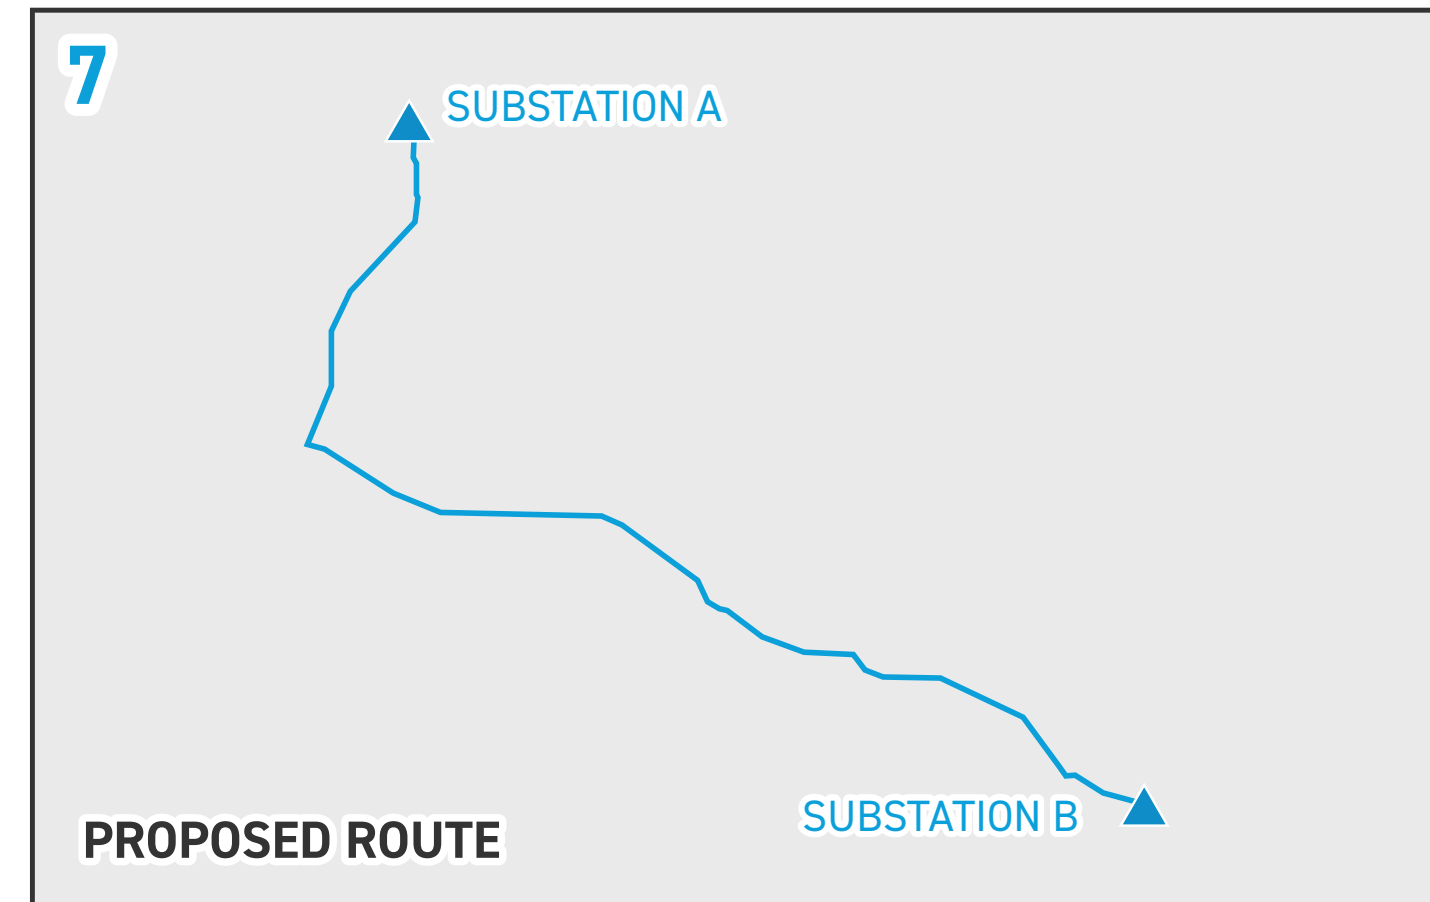

7. Proposed Route: Alternative routes are assessed, and a proposed route is chosen. The proposed route minimizes impact to the community and environment, while considering cost, line length, and design requirements.

ROUTING CONSIDERATIONS




We aim to build transmission lines that power communities and the economy while minimizing community and environmental impacts.




Our project teams review a variety of environmental factors including:



Current and proposed public and private land uses




Aesthetics and visual impacts



Water quality, including potential impacts on wetlands, streams and water bodies




Wildlife, vegetation and fisheries, including threatened and endangered species




Soils and geology



Community and neighborhood growth and development



Historic and archaeological sites




Existing Infrastructure, such as power lines, roads, railroads, pipelines and renewables



Environmental & Social Justice Impacts

We identify and comply with all required local, state and federal permitting agencies.

TYPICAL STRUCTURE

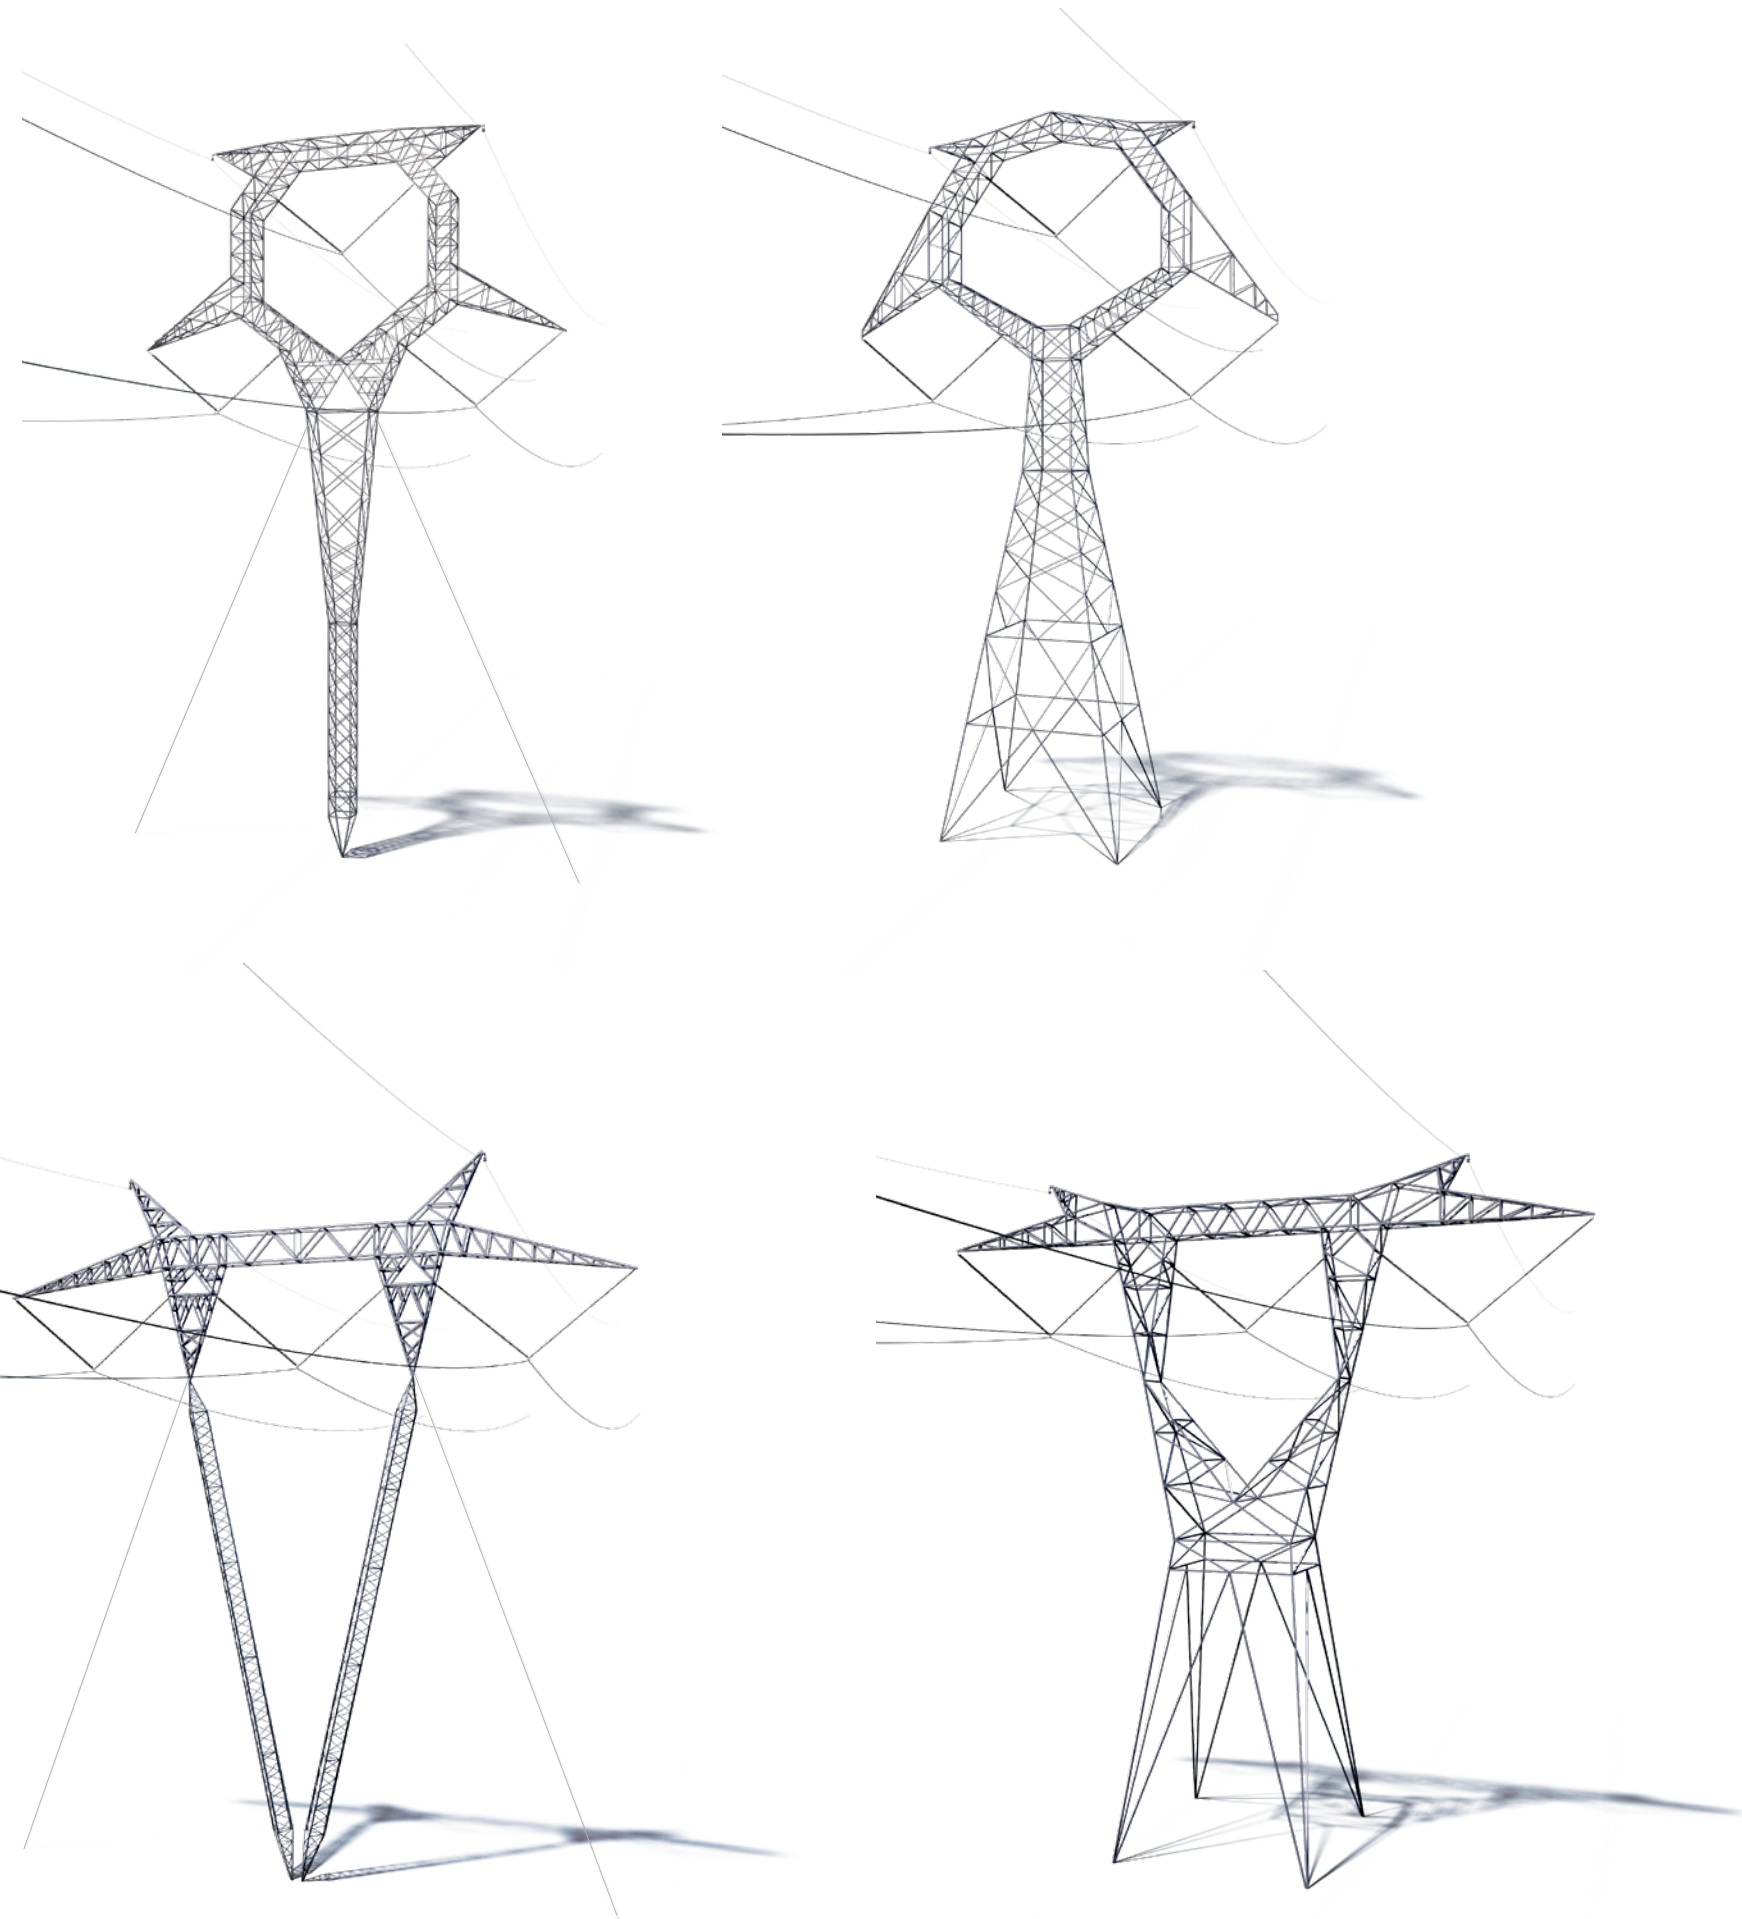

The project involves the use of steel lattice towers.

Tower Height: [Approximately 155 feet*](#)


Right-of-Way Width: [Approximately 200 feet*](#)

*Exact structure, height, and right-of-way requirements may vary.

RIGHT-OF-WAY ACTIVITIES

We have two key philosophies regarding power line rights-of-way:

1. Routes should minimize disturbance to the community and the environment.
2. Property owners should be fairly compensated for any acquired land rights.

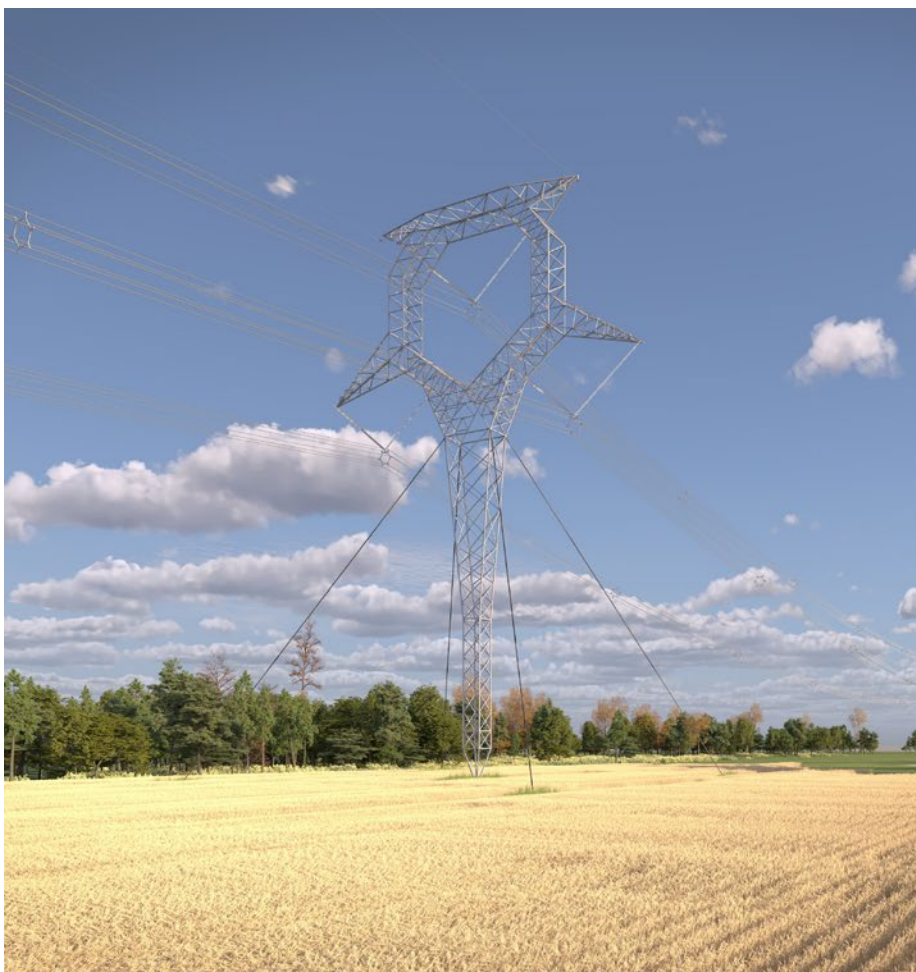

Once we study the land and propose line routes, we reach out to landowners for the following:

To obtain permission to access your property for activities such as:

- Environmental assessments
- Appraisal work
- Land surveying, soil boring and other field activities
- Cultural and historical resource reviews

To secure rights-of-way and communicate:

- Easement compensation
- Easement terms and conditions
- Right-of-way width

To outline our construction process with a specific focus on:

- Property access and special conditions
- Property restoration
- Damage mitigation as appropriate

GENERAL CONSTRUCTION PROCESS



Existing Conditions

AEP Ohio representatives understand the work related to transmission improvements can sometimes be an inconvenience. That's why we make every effort during construction to be respectful of the environment and our neighbors.

Company representatives work with individual property owners throughout the construction process. Crews will likely return to individual properties multiple times to complete different phases of construction. Right-of-way agents will provide details of upcoming work at each phase and listen to your feedback on how we can lessen the impact of our work.

GENERAL CONSTRUCTION PROCESS



Construction Corridor Development

Crews prepare for construction by:

- Building access roads.
- Marking utilities and tower locations along the power line route using stakes and flags.
- Clearing trees and woody-stemmed vegetation from the right-of-way. Crews may clear danger trees outside the right-of-way as allowed per the easement language.
- Removing obstructions from the right-of-way.
- Installing safety and environmental controls.

GENERAL CONSTRUCTION PROCESS



Foundation Installation

- Temporary construction activities occur at individual structure locations within the approved right of way.
- Large equipment (such as drilling rigs, excavators, and concrete trucks) and construction crews may be present during daytime hours.
- Drilling or excavation will take place to install underground foundations that support transmission structures, which may result in short term noise, vibration, and truck traffic.
- Concrete placement or backfilling will follow excavation, after which the foundation is allowed time to cure.

The visual renderings are a general representation. Final engineering, permitting, and construction details are not complete. Exact structure type, height and right-of-way requirements may vary.

GENERAL CONSTRUCTION PROCESS



Tower Installation

- Construction crews and large equipment will be present at approved tower locations within the right of way.
- Tower components may be delivered and assembled on the ground near the installation area.
- In some locations, helicopters may be used to transport tower components to reduce ground disturbance or access difficult terrain.
- Cranes or lifting equipment may also be used to place tower sections onto the completed foundations.
- The tower is set, aligned, and secured in accordance with engineering and safety requirements.

GENERAL CONSTRUCTION PROCESS



Wire Installation

- Construction crews and specialized equipment will be present along the right of way at and between installed structures.
- Helicopters can be used to install overhead wires, allowing work to be completed efficiently while reducing ground disturbance.
- Wires are temporarily pulled and supported between structures before being placed in their final position.
- Tensioning equipment is used to properly secure the wire to meet design, safety, and clearance requirements.
- Short term noise and air traffic from helicopters may occur during daytime hours.

GENERAL CONSTRUCTION PROCESS




Facilities Placed In Service

- After tower and wire installation is complete, crews perform final inspections and safety checks.
- The transmission line is energized and placed into service to support reliable electric service.
- Construction equipment and temporary work areas are removed from the right of way.
- Disturbed areas are restored to pre construction condition or better, consistent with project agreements and permits.
- Project teams work directly with landowners to address any remaining property impacts or damage related to construction.

FIELD ACTIVITIES



Ground Penetrating Radar: Ground Penetrating Radar (GPR) helps identify the location of underground utilities. A device that looks similar to a lawnmower, and is nondestructive to the soil, uses radio frequencies to detect objects below the ground's surface. Maps and images are created from the data.

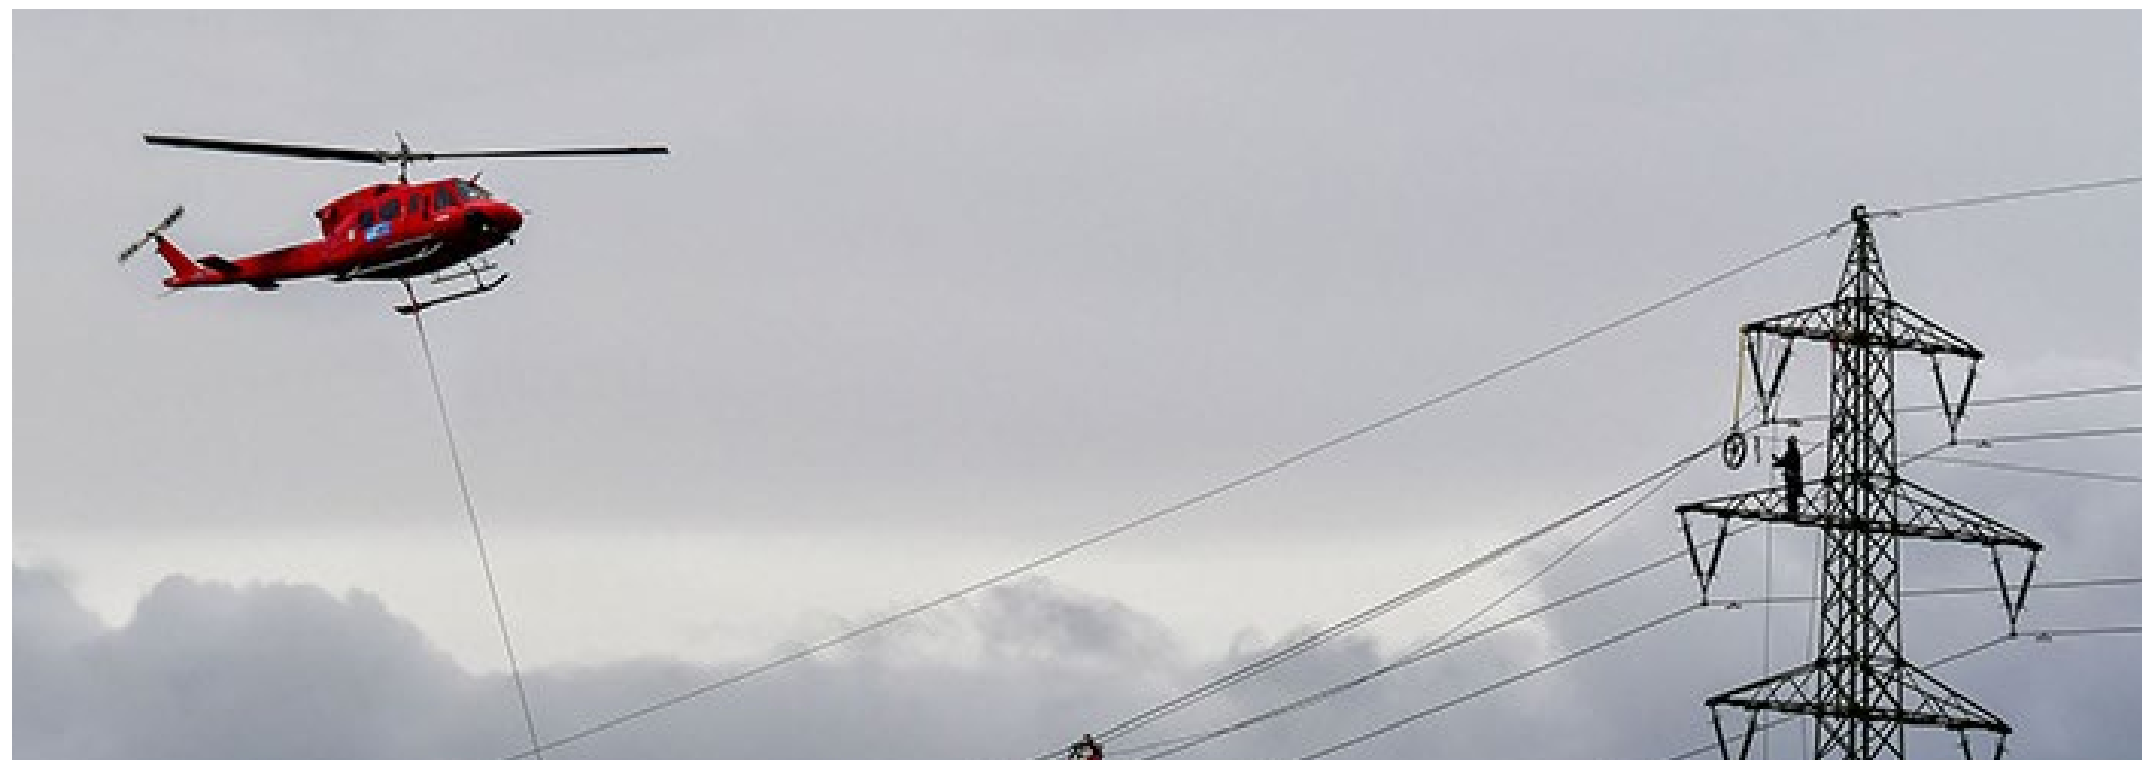


Helicopter: Challenging terrain or other restrictions/obstructions can make accessing certain parts of a project area difficult. In these locations, crews use helicopters to install structures, string conductors, perform line work and maintain electric facilities. Company representatives work with local media outlets to communicate these activities to the public.

FIELD ACTIVITIES



Hydro Excavation: Crews use hydro excavation (hydrovac) in areas where many underground utilities are located near each other. This process involves using pressurized water to break down soil to expose underground utilities. Afterward, crews backfill the area. The process helps prevent damage to underground infrastructure while gathering important information.

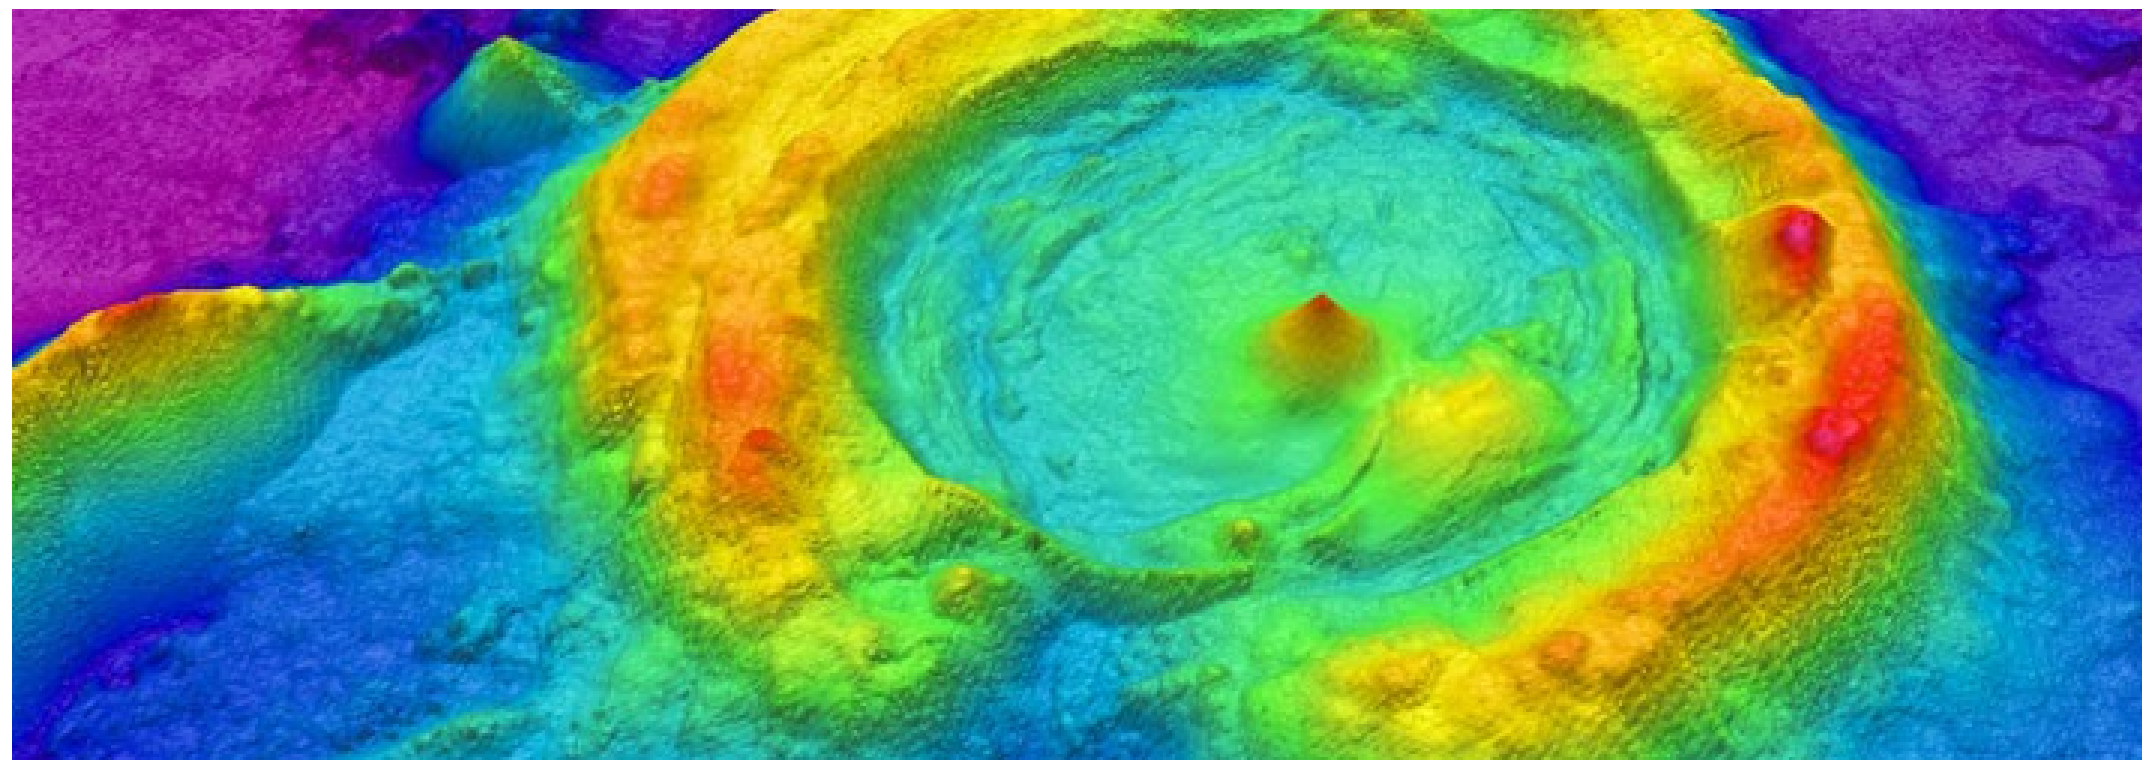

LiDAR: LiDAR (Light Detection and Ranging) uses laser pulses to measure the distance of an object to the source. The data points result in digital 3D maps for accurate design and engineering. LiDAR surveying crews use mobile (car or aerial vehicle) or static (tripod) equipment.

FIELD ACTIVITIES



Soil Borings: Field crews use a drill to bring up soil samples and then backfill the holes. Testing the core samples helps determine soil conditions in the area. Soil conditions and types can affect structure location and foundation design.



Cultural Resource Study: Field crews walk the area and conduct multiple excavation tests to identify historical and archaeological artifacts. Landowners also provide information about their property to survey crews.

FIELD ACTIVITIES



Environmental Survey: Surveyors collect information about the habitats and physical attributes of the project area. They also look for ecological concerns like wetlands, flood plains and forests. This process can help protect endangered species, such as the Indiana Bat and American Burying Beetle.




Unmanned aerial vehicles: Unmanned aerial vehicles (UAVs), or drones, perform aerial inspections and safely gather data and detailed images of electric facilities. Company employees and vendors comply with all commercial Federal Aviation Administration (FAA) guidelines. Company representatives work with local media outlets to communicate these activities to the public.

FIELD ACTIVITIES



Staking:

- Field crews use staking to mark the project area, identify utility equipment and pinpoint future structure locations. This process essentially transfers engineering and construction plans to the field.
- Right-of-way crews use staking to identify parcel boundaries, easement boundaries and other utility locations within the company's rights-of-way.
- Environmental crews use staking to identify wetlands or other environmentally sensitive areas.

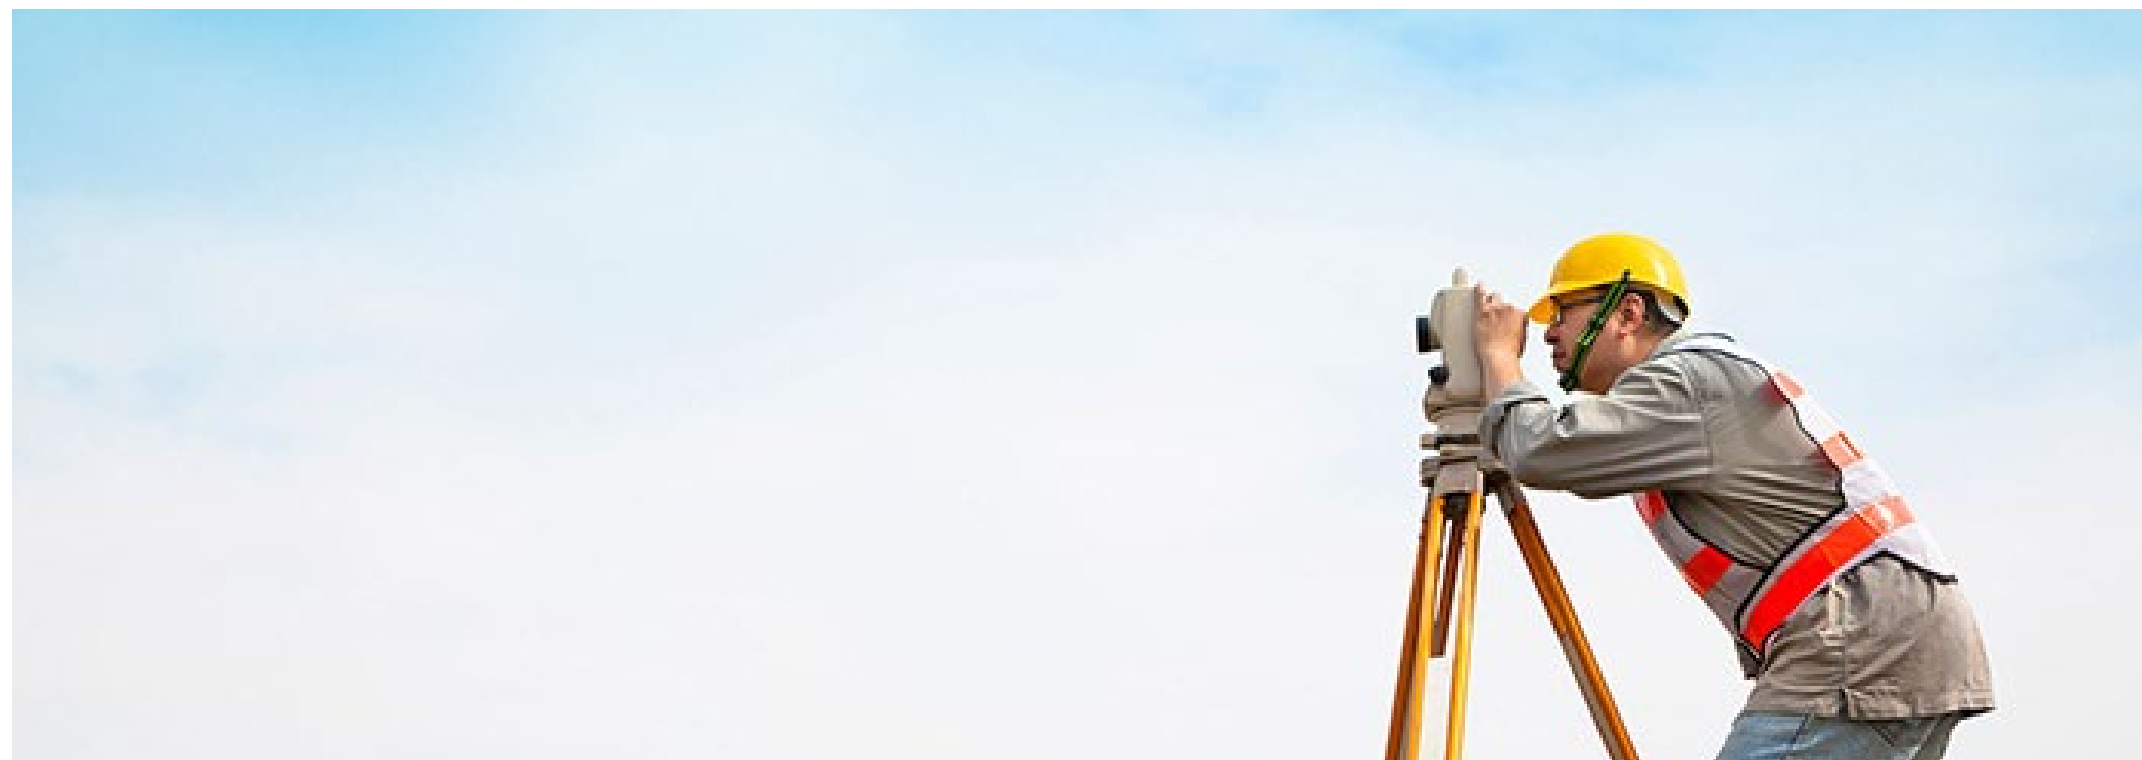

Field Survey:

- Field survey crews help determine an appropriate route for a new transmission line by identifying constraints within the project area.
- Engineers conduct extensive studies of the terrain and soil to determine what types of structures and foundations are most suitable. They also gather information to create digital 3D maps of the project area to help engineer and design the project.

VEGETATION MANAGEMENT




What is vegetation management? AEP's vegetation management approach involves controlling the growth of trees and other vegetation in transmission rights-of-way, the sections of land where transmission power lines are located.

AEP Transmission's vegetation management program helps balance the need for reliable service with respect for the natural environment. The company uses contract forestry crews to complete vegetation management work.

Why is it done? To reduce power outages caused by trees and other plants contacting power lines.

Our vegetation management program aims to:



Work safely and efficiently




Protect the electric grid and reduce power outages



Foster positive relationships with customers and communities



Comply with federal, state and local regulations



Minimize negative impacts to the environment

The North American Electric Reliability Corporation (NERC) sets standards that require utilities to establish minimum clearance distances between transmission lines and the nearest vegetation. Non-compliance can lead to significant community-wide power outages.


- Crews may clear identified danger trees outside the right-of-way as allowed per easement language.
- When possible and practical, crews use selective clearing practices to retain low-growth shrubs and bushes.

*Landowners should speak with a company representative to identify plants that are safe to place in the right-of-way.


THANK YOU!




Thank you for visiting the project virtual open house. For more information and project updates please visit the project website, or contact us with any additional questions.

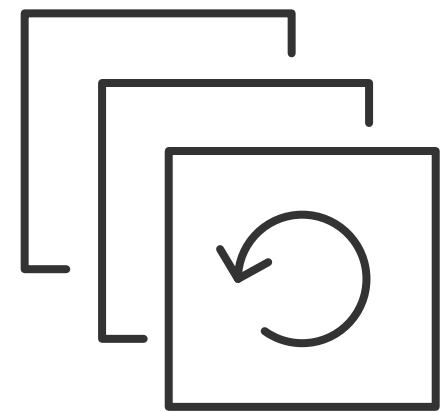


**Replay
Open House**

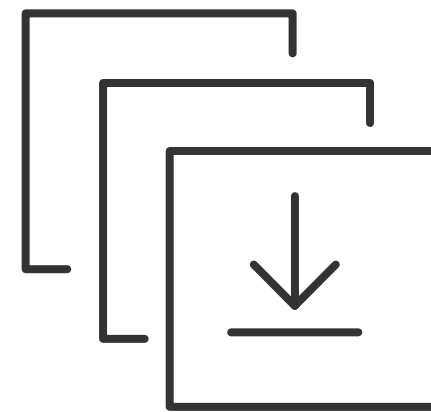

**Download
Slide Deck**

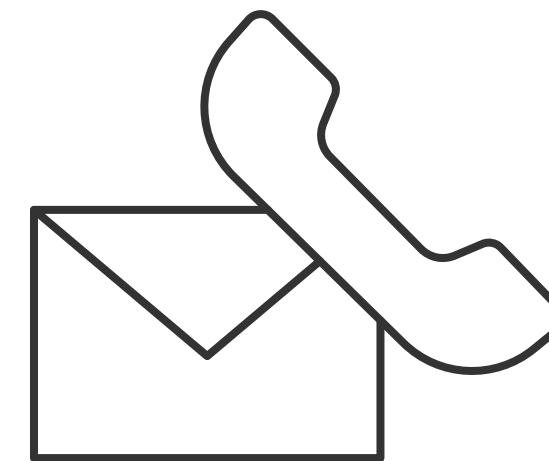

Contact Us

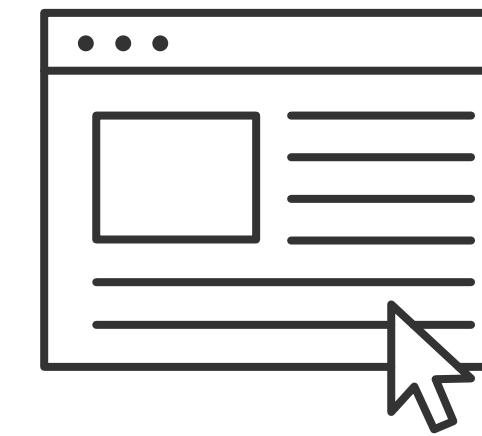

**Visit Project
Website**