

Lulu–Sorenson Transmission Improvements Project

Indiana Michigan Power (I&M) representatives plan power grid upgrades to improve electric reliability for customers in northeastern Indiana and southern Michigan. The Lulu–Sorenson Transmission Improvements Project involves building approximately 75 miles of 765-kilovolt (kV) transmission line, as well as improving the Sorenson Substation to enhance electric reliability for area customers.

What

The project involves:

- Building approximately 75 miles of 765-kV transmission line from Sorenson Substation, located in eastern Indiana, and extending to a point at the Indiana/Michigan state line.
- Improving the existing Sorenson Substation.

Why

This project is a transmission solution proposed by American Electric Power (AEP) and subsequently selected by Midcontinent Independent System Operator (MISO) through its regional planning process to address identified system needs. This project will strengthen the reliability of the regional electric grid, lower the risk of future outages and support faster service restoration when outages occur. The project will also create opportunities for future growth and development.

Where

The project study area includes:

Huntington County:
Jackson township

Allen County:
Adams, Jackson, Jefferson, Lafayette, Maumee, Milan, Monroe, Perry, Pleasant, Scipio and Springfield townships


DeKalb County:
Garrett City

Steuben County:
Clear Lake, Fremont, Otsego, Pleasant, Richland, Salem, Scott, Steuben and York townships

Whitley County
Jefferson, Smith and Union townships

Noble County
Swan township

Project Schedule

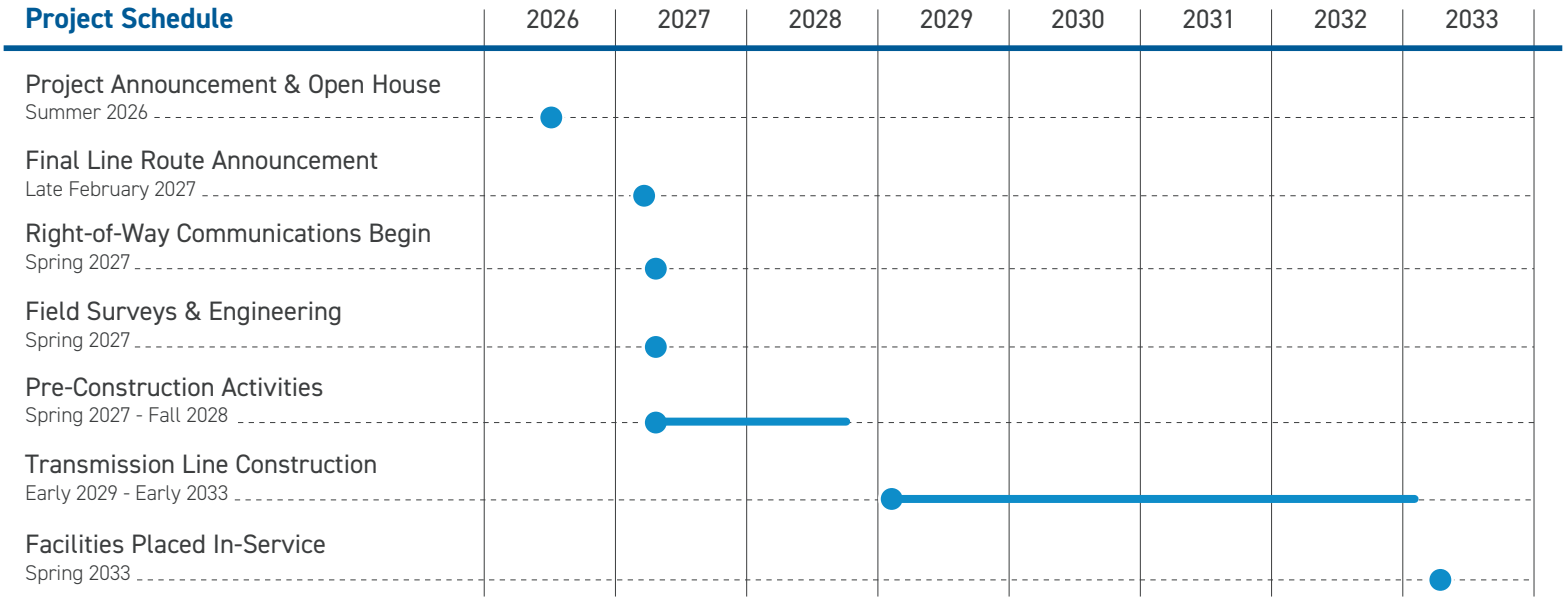



*Timeline subject to change.


Typical Structures

The project involves the use of guyed or free-standing lattice towers.


Proposed Structure Height:
Approximately 175 Feet*
Proposed Distance Between Structures:
Approximately 1200 Feet*
Proposed Right-of-Way Width:
180–200 Feet*

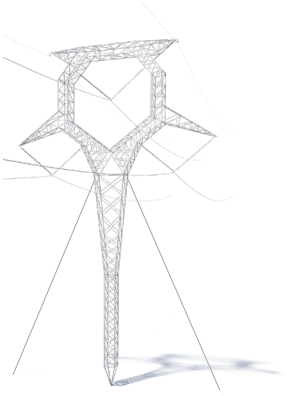

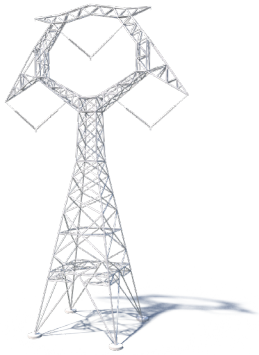

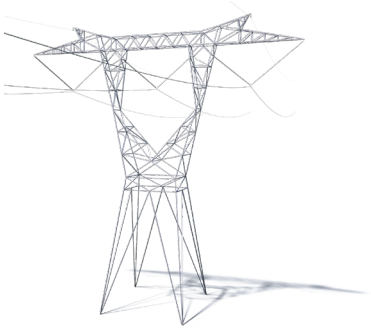

*Exact structure, height, and right-of-way requirements may vary.

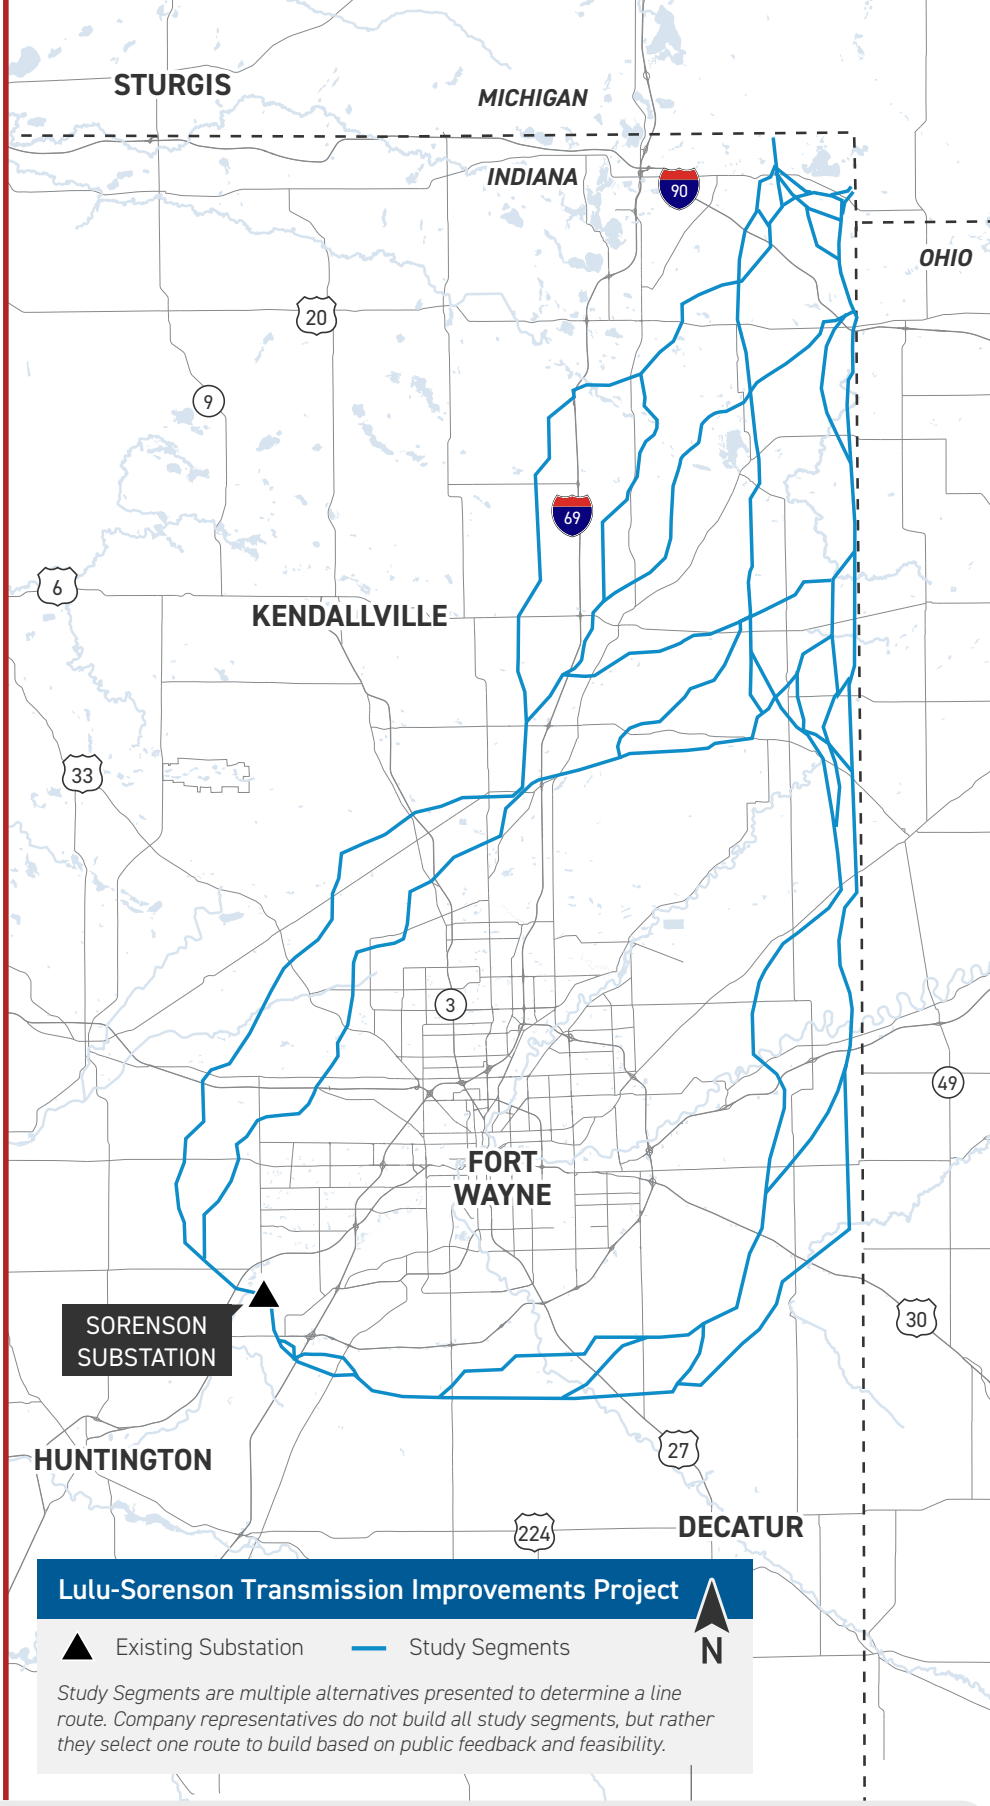

We value your input. Please send comments and questions to:
Delia Makhetha • Project Outreach Representative, WSP representing I&M
IMoutreach@aeptransmission.com • (877) 605-5554

IndianaMichiganPower.com/Lulu-Sorenson

11/4/2026